



# DYNASTY

## PEB92 Series

PRESSURE INDEPENDENT CONTROL VALVE



Compact **Design**  
Tolerates **Heavily Contaminated** Water  
**Removable** Cartridge

## PEB92 DYNASTY TECHNICAL SPECIFICATIONS

The new **Dynasty** range of **PICV** has been developed to give all the advantages of the existing **PICCV** range with the added benefit of being designed and tested to **operate in heavily contaminated water**. The valve has a **Linear characteristic and has been designed to allow the internals to be removed, clean and replaced** without affecting the performance of the valve. The **Dynasty** valve is designed and manufactured in Italy to the highest standard and can be incorporated into one of Pettinaroli UK's off the shelf or bespoke designed pre assembled kits.

**Patented**  
PATENT  
IT1428884  
US9910447 B2  
EP3067772 B1

### FEATURES & BENEFITS

- ✓ Designed and Tested for use in **HEAVILY CONTAMINATED** water
- ✓ **COMPACT** Size
- ✓ **EASILY ACCESSIBLE & MAINTAINABLE** Cartridge
- ✓ Designed and Fully **MANUFACTURED IN ITALY**
- ✓ **SIMPLE** Pre-setting of valve
- ✓ Designed for **HEAT INTERFACE UNITS & CHILLED BEAMS**

### ✓ **ACCESSIBLE** cartridge for easy maintenance

- Headwork and its diaphragm can be **easily accessed** to perform maintenance, **cleaning or replacement** procedure

A key feature of the **Dynasty** valve is the **ability to work in heavily dirty water**. Pettinaroli recommend that all water distribution systems are properly flushed. For those systems where the water quality is poor the **Dynasty** has been **designed to operate longer** than any other **PICV** on the market and has the **added feature** that the valve can easily be disassembled, cleaned and the cartridge replaced



### ✓ **INTERNAL PRESETTING** with stroke reduction of the control valve

- It is possible to set the selected flow by following some simple steps:





**PEB92VL-PEB92L**  
1/2"



**PEB92H**  
1/2"




**PEB92L-PEB92H**  
3/4"



**PEB92L-PEB92H**  
1"

**TECHNICAL INFORMATION**

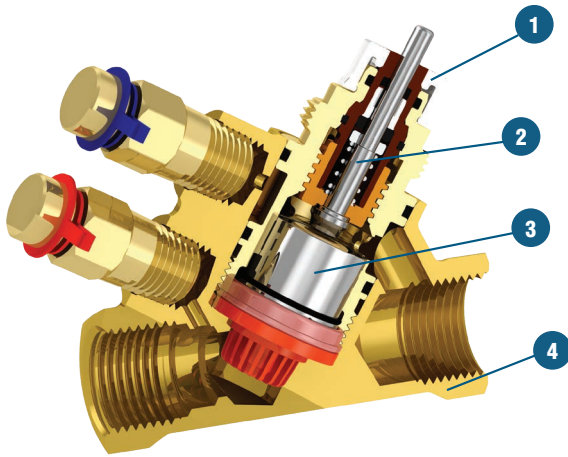

	Material list
Regulating valve (2)	High performance polymer, stainless steel
Pre-setting knob (1)	ABS + PC
Cartridge with diaphragm (3)	High performance polymer, WMQ silicon, stainless steel, HNBR
Body (4)	Corrosion resistant brass CW602N
O-rings	EPDM-x

ΔP max.	Close off pressure	Temperature	Working pressure max.	Stroke	Leakage
600 kPa / 6 bar	600 kPa / 6 bar	-10 ÷ 120 °C	2500 kPa / 25 bar	3 mm ( 1/2" - 3/4" ) 6 mm ( 1" )	Classe IV IEC 60534-4

	PEB92VL.04	PEB92L.04	PEB92H.04	PEB92L.06	PEB92H.06	PEB92L.08	PEB92H.08
	PEB92VL.04.X	PEB92L.04.X	PEB92H.04.X	PEB92L.06.X	PEB92H.06.X	PEB92L.08.X	PEB92H.08.X
Flow rate max.	150 l/h 0,042 l/s	450 l/h 0,125 l/s	850 l/h 0,236 l/s	1000 l/h 0,278 l/s	1850 l/h 0,514 l/s	2500 l/h 0,694 l/s	3300 l/h 0,917 l/s
Start-up max	25 kPa 0,25 bar	35 kPa 0,35 bar	25 kPa 0,25 bar	25 kPa 0,25 bar	30 kPa 0,30 bar	30 kPa 0,30 bar	35 kPa 0,35 bar
Connections	Rp 1/2" F EN 10226-1	Rp 1/2" F EN 10226-1	Rp 1/2" F EN 10226-1	Rp 3/4" F EN 10226-1	Rp 3/4" F EN 10226-1	Rp 1" union F EN 10226-1	Rp 1" union F EN 10226-1

**APPLICATIONS**


The new Dynasty range of PICV has been designed to provide flow limitation and temperature control of heating and chilled water systems to terminal units. The Dynasty valve provides good control of water to water heat exchangers and is ideal for use in Heat Interface Units where water quality is difficult to maintain, due to the difficulty in accessing every unit. The Dynasty valve can also be fitted in valve assemblies to be connected to Fan Coil Units

## PEB92 DYNASTY



Dynasty PICV - Externally Adjustable 1/2 - 1" PICV with Linear Characteristic with removable cartridge and test points. DZR Body with Female BSP Connections. Maximum Flow rate of 3300 l/h.

PATENT IT1428884  
US9910447 B2  
EP3067772 B1


Ø"		Code
1/2" - 150 l/h	1	PEB92VL.04
1/2" - 450 l/h	1	PEB92L.04
1/2" - 850 l/h	1	PEB92H.04
3/4" - 1000 l/h	1	PEB92L.06
3/4" - 1850 l/h	1	PEB92H.06
1" - 2500 l/h	1	PEB92L.08
1" - 3300 l/h	1	PEB92H.08

## PEB92\_X DYNASTY



Dynasty PICV - Externally Adjustable 1/2 - 1" PICV with Linear Characteristic with removable cartridge. DZR Body with Female BSP Connections. Maximum Flow rate of 3300 l/h.

PATENT IT1428884  
US9910447 B2  
EP3067772 B1

Ø"		Code
1/2" - 150 l/h	1	PEB92VL.04.X
1/2" - 450 l/h	1	PEB92L.04.X
1/2" - 850 l/h	1	PEB92H.04.X
3/4" - 1000 l/h	1	PEB92L.06.X
3/4" - 1850 l/h	1	PEB92H.06.X
1" - 2500 l/h	1	PEB92L.08.X
1" - 3300 l/h	1	PEB92H.08.X

## CPD SEMINARS AND TRAINING

Join one of the many companies to take advantage of **Pettinaroli UK's specialist seminars and training**. To further your knowledge in the sector Pettinaroli UK are able to deliver **CPD's** in the following areas:

- 1) The Definitive Guide to PICVs
- 2) Energy efficiency with PICV
- 3) Water Quality, Commissioning and Energy Management PICCV & PICVs



CPD's can be delivered **on site or remotely** to suit your needs.

To register your interest please email [solutions@pettinaroliuk.com](mailto:solutions@pettinaroliuk.com) or give us a call on 0121 3582012.



**Pettinaroli UK**

Riverside, Unit K - Austin Way - Hamstead Industrial Estate Birmingham B42 1DU  
Telephone: +44 (0)121 358 2012 - Email: [solutions@pettinaroliuk.com](mailto:solutions@pettinaroliuk.com)  
web: <http://www.pettinaroliuk.com>



FS514077