




DESCRIPTION

188NDA

Horizontal and vertical anti corrosion brass non return valve. Conform to standard BS 6282/1.

DIMENSIONS

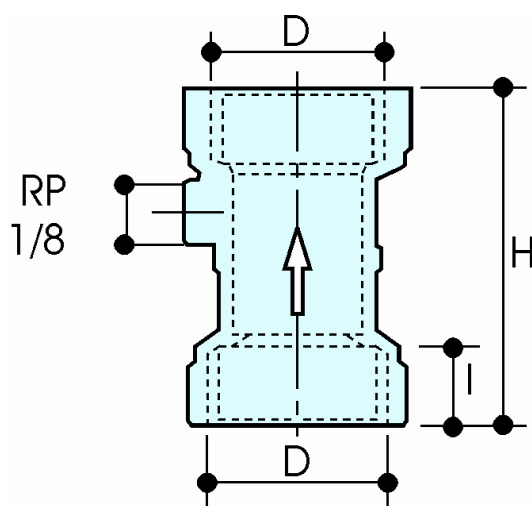

D	½"	¾"	1"	1 ¼"	1 ½"	2"
H	60	65,6	78	85,4	91	114,5
I	17	18	21,5	23,5	23,5	28
Weight [g]	100	160	290	420	550	987


Dimensions in **mm**

All threads are conform to ISO 7 or ISO 228 standards

MATERIALS

Body	CW602N (UNI EN 12165) CuZn36Pb2As
Inspection cap	CW602N (UNI EN 12165) CuZn36Pb2As
Non return valve	Ocean IO type
Body	POM
Shutter	POM
Spring	Stainless steel
O-Ring	Rubber
Diaphragm	Rubber

PRESSURE DROP DIAGRAM

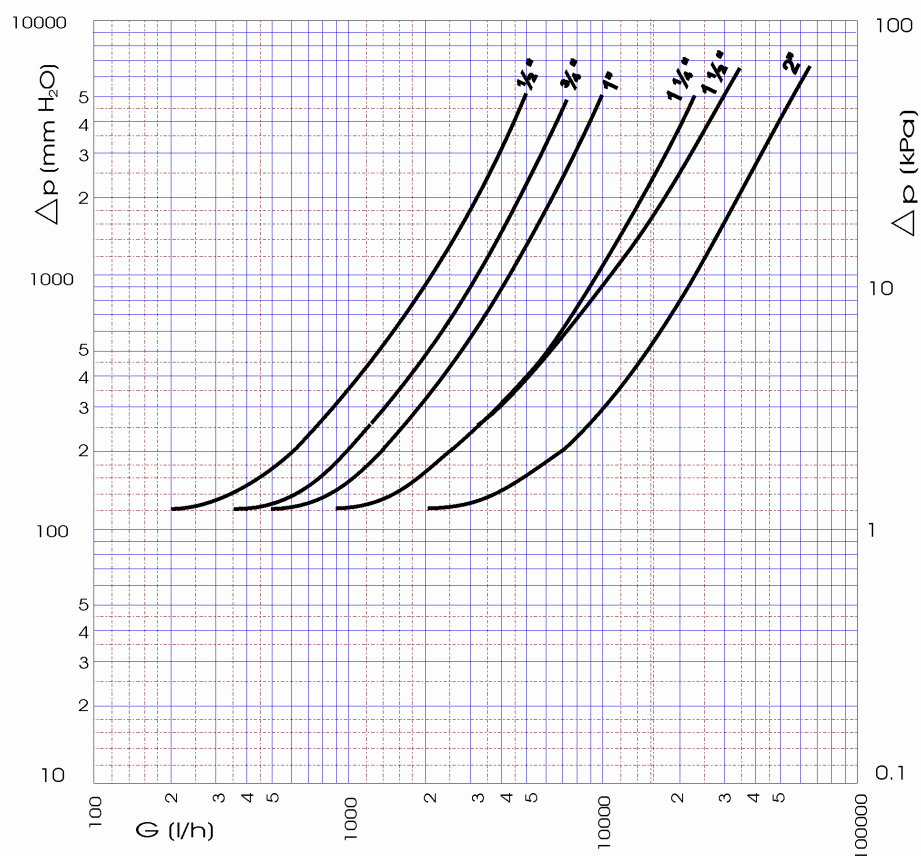

Dim.	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv	6	11	15	28	45	80
PN	10	10	10	10	10	10

RECOMMENDED WORKING PRESSURE / TEMPERATURE LIMITS

10 bar - 90°C - non shock