




DESCRIPTION

52CET

F x F "Extra Compact" full-flow ball valve with extended plastic lever.

Conform to **EN 13828**

DIMENSIONS

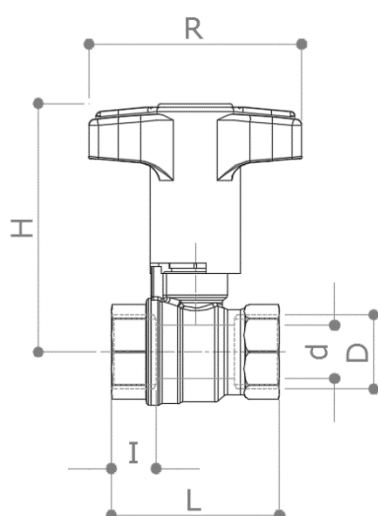

D	½"	¾"	1"	1 ¼"
d	15	20	25	32
H	70	75	78	85
I	10.5	12	13.5	15.5
L	51.4	63	73	86
R	60	67	67	80
Weight [g]	170	280	410	740

Dimensions in **mm**

All threads are conform to ISO 228 standard

MATERIALS

Body CW617N (EN 12165) CuZn40Pb2 External nickel plated

Ball CW617N (EN 12165) CuZn40Pb2 Chrome plated

Stem CW614N (EN 12164) CuZn39Pb3

Stuffing box CW614N (EN 12164) CuZn39Pb3

Seat 2 x PTFE + 1 x PTFE seal on the stem

O-Rings 2 x FKM

Handle Extended lever in Nylon PA66

APPROVALS




RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS

28 bar – 100°C – non shock (½" – 1")

10 bar – 150°C – non shock

PRESSURE DROP DIAGRAM

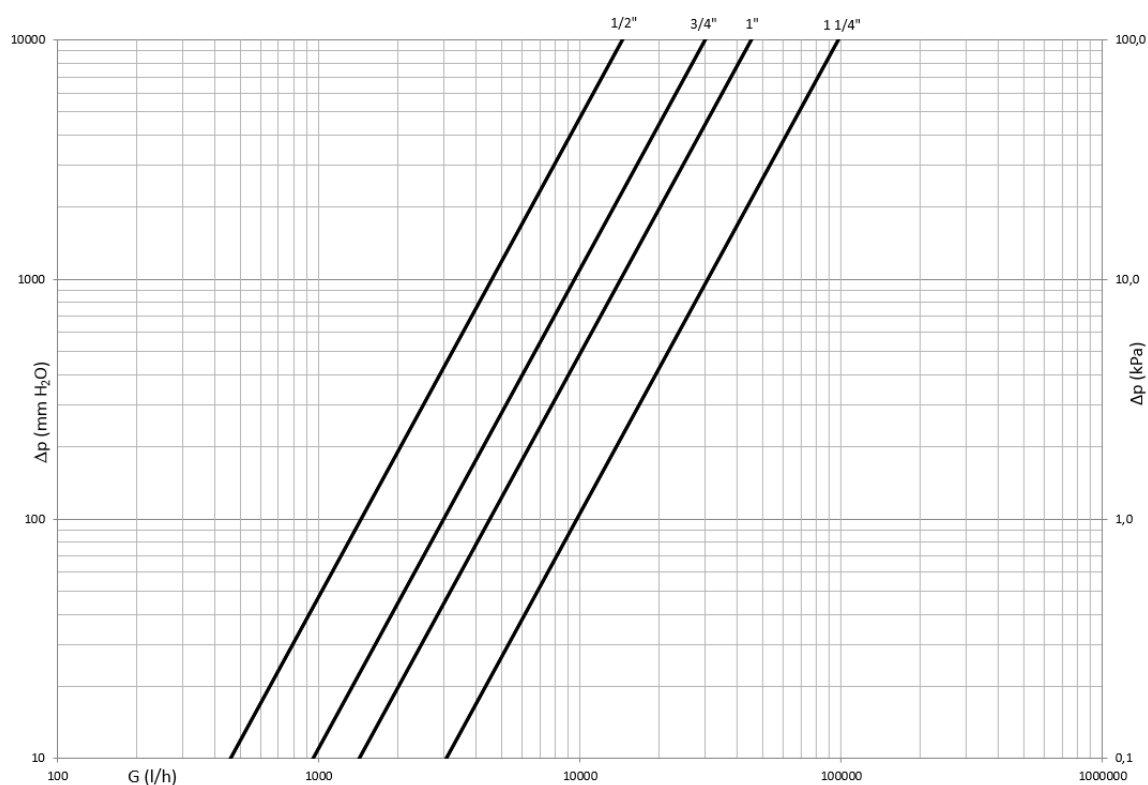

Dim.	1/2"	3/4"	1"	1 1/4"
Kv	14.5	30	45	97
PN	28	28	28	20

TEMPERATURE / PRESSURE DIAGRAM

