




DESCRIPTION

51CE/2

M x M end “Extra Compact” full port ball valve with red steel lever.

Conform to **EN 13828**

DIMENSIONS

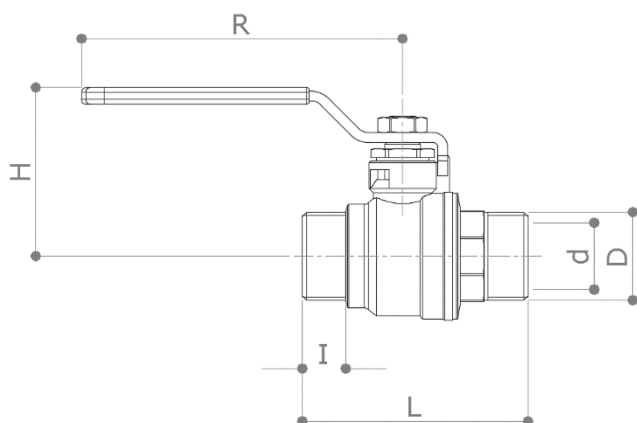

D	½"	¾"	1"
d	15	20	25
H	39	49	52
I	12	13	14
L	56	67.5	76.5
R	75	95	95
Weight [g]	190	300	450

Dimensions in **mm**

All threads are conform to ISO 228 standard

MATERIALS

Body	CW617N (EN 12165) CuZn40Pb2 External nickel plated
Ball	CW617N (EN 12165) CuZn40Pb2 Chromium plated
Stem	CW614N (EN 12164) CuZn39Pb3
Stuffing box	CW614N (EN 12164) CuZn39Pb3
Seat	2 x PTFE + 1 x PTFE seal on the stem
O-Rings	2 x FKM
Handle	Delta Protect coated steel. PVC grip with “Pad printing”

APPROVALS




RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS

28 bar – 100°C – non shock

10 bar – 150°C – non shock

PRESSURE DROP DIAGRAM

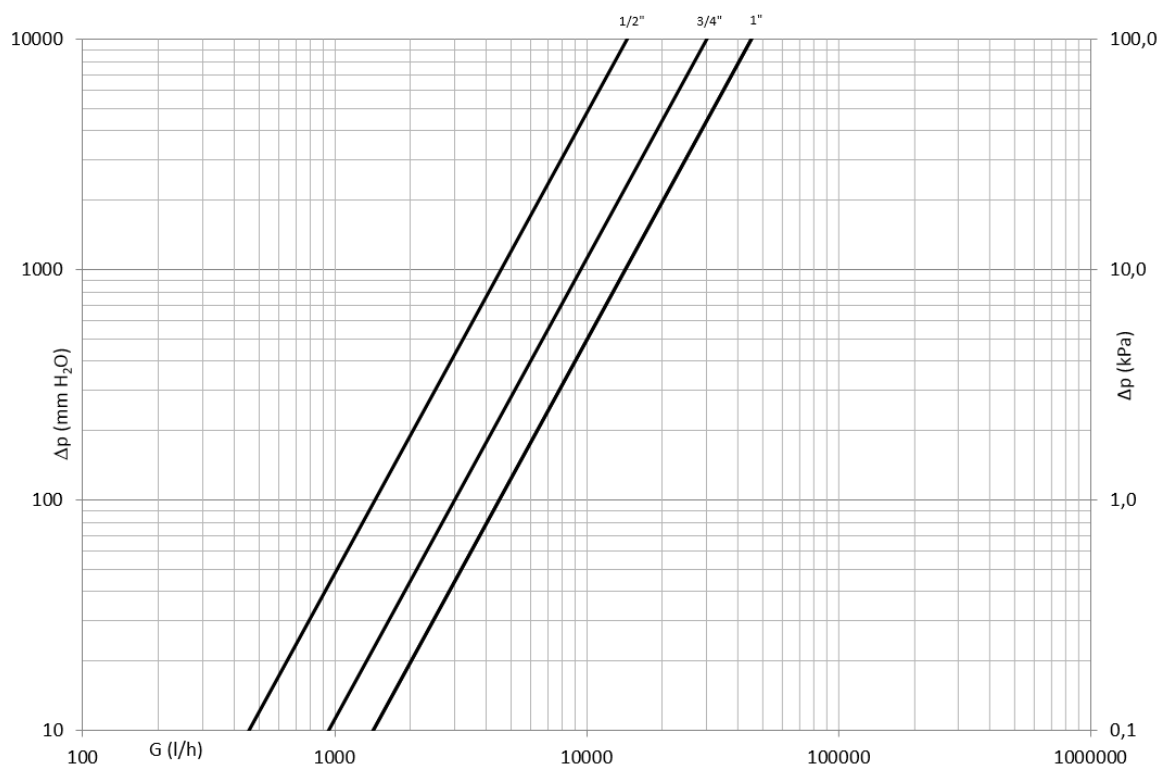

Dim.	1/2"	3/4"	1"
Kv	14.5	30	45
PN	28	28	28

TEMPERATURE / PRESSURE DIAGRAM

