



DESCRIPTION


760R

Angle radiator valve, with thermostatic option or thermo-electric control. Female end. Radiator connection: union end with O-Ring.

Connection to actuator: **M28 x 1.5 mm**

Nickel plated.

DIMENSIONS

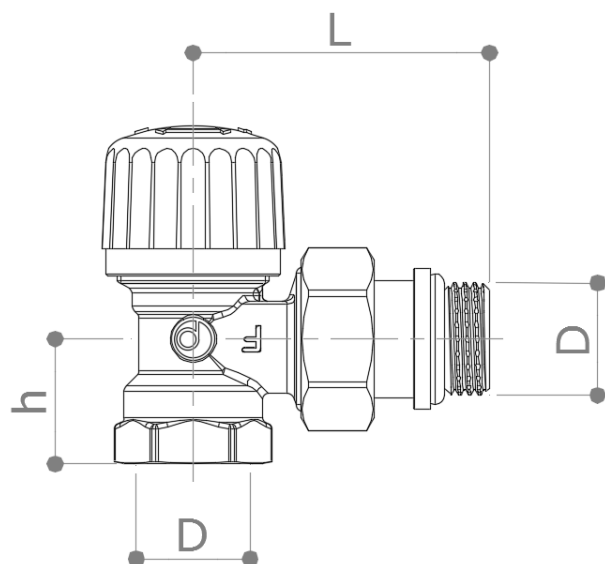

D	3/8"	1/2"
h	20	23
L	49	52.5
Weight [g]	195	230

Dimensions in **mm**

All threads are conform to ISO 7 standard

MATERIALS

Body	CW617N (EN 12165) CuZn40Pb2
Union	CW617N (EN 12165) CuZn40Pb2
Nut	CW617N (EN 12165) CuZn40Pb2
Stem	AISI303
Headwork	CW614N (EN 12164) CuZn39Pb3
Stuffing box	CW614N (EN 12164) CuZn39Pb3
O-Rings	EPDM-X - EPDM
Handwheel	ABS

PRESSURE DROP DIAGRAM

Angle

$$\Delta P = \left[\frac{Q}{Kv} \right]^2$$

$$Q = Kv * \sqrt{\Delta P}$$

Where

Q is the flow rate [m³/h]


Kv is the flow rate factor [m³/h]

ΔP is the pressure drop across the valve [bar]

$$q_{mNH} = 170 \text{ kg/h}$$

$$a = 0.92$$

ΔT [°C]	Kv	
	3/8"	1/2"
1K	0.28	0.28
2K	0.54	0.54
T.O.	1.60	1.70

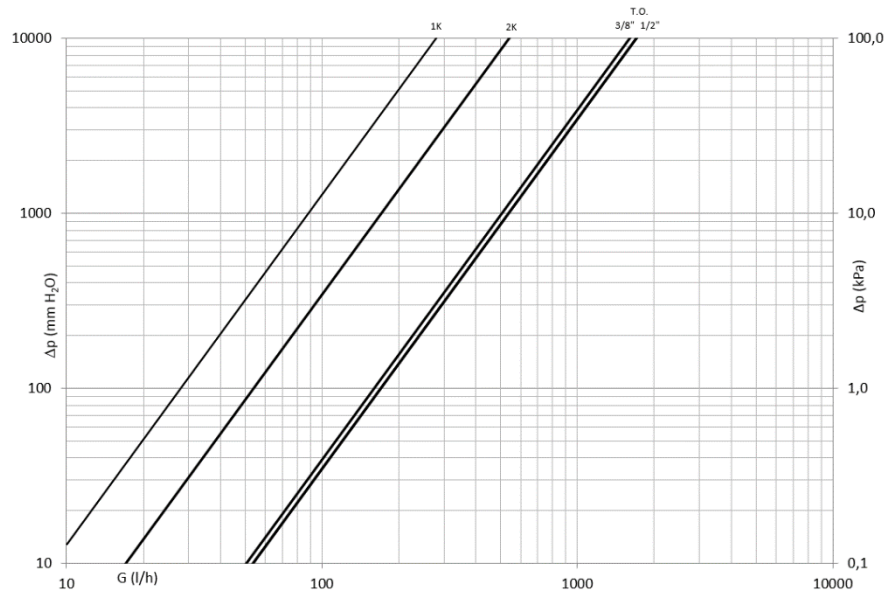

T.O.: Total Open

RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS

10 bar – 110°C – non shock

AVAILABLE THERMOSTATIC HEAD

106CN



107L



108L



EN215 n°49

109L



EN215 n°49

Additional options are available.