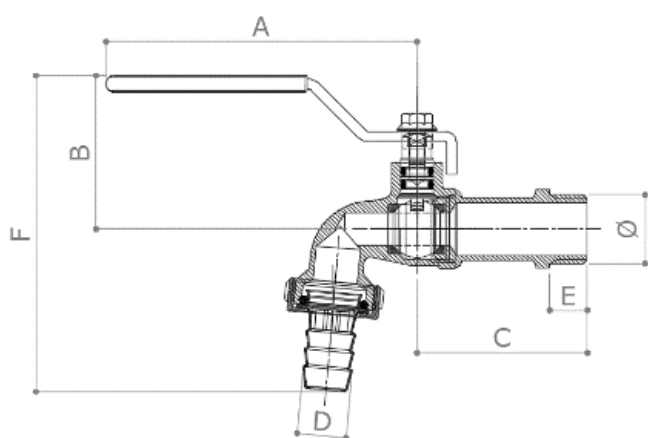



DESCRIPTION

296N

Hose union ball bibcock normal type with red steel lever.
Nickel plated.

Conform to **EN 13828**

DIMENSIONS


DN	½"	¾"	1"
A	88	88	99
B	37	38	45
C	56	62	72
D	15	20	26
E	15	15	16
F	84	95	106
Ball	10	12	20
Weight [g]	210	280	550

Dimensions in **mm**

All threads are conform to ISO 228 standard

MATERIALS


Body	CW617N (DIN 50930 part.6) CuZn40Pb2 Nickel plated
Ball	CW617N (DIN 50930 part.6) CuZn40Pb2 Chrome plated
Stem	CW614N (DIN 50930 part.6) CuZn39Pb3
Seat	2 x PTFE
O-rings	2 x NBR and 1 x NBR
Tap aerator	Moplen
Hose union	CW614N (DIN 50930 part.6) CuZn39Pb3
Ring	CW617N (DIN 50930 part.6) CuZn40Pb2
Lever	Galvanized coated steel. PVC grip with "Pad Printing".

TEMPERATURE LIMITS

Maximum working temperature: 120 °C

Minimum working temperature: -20 °C

PRESSURE DROP DIAGRAM

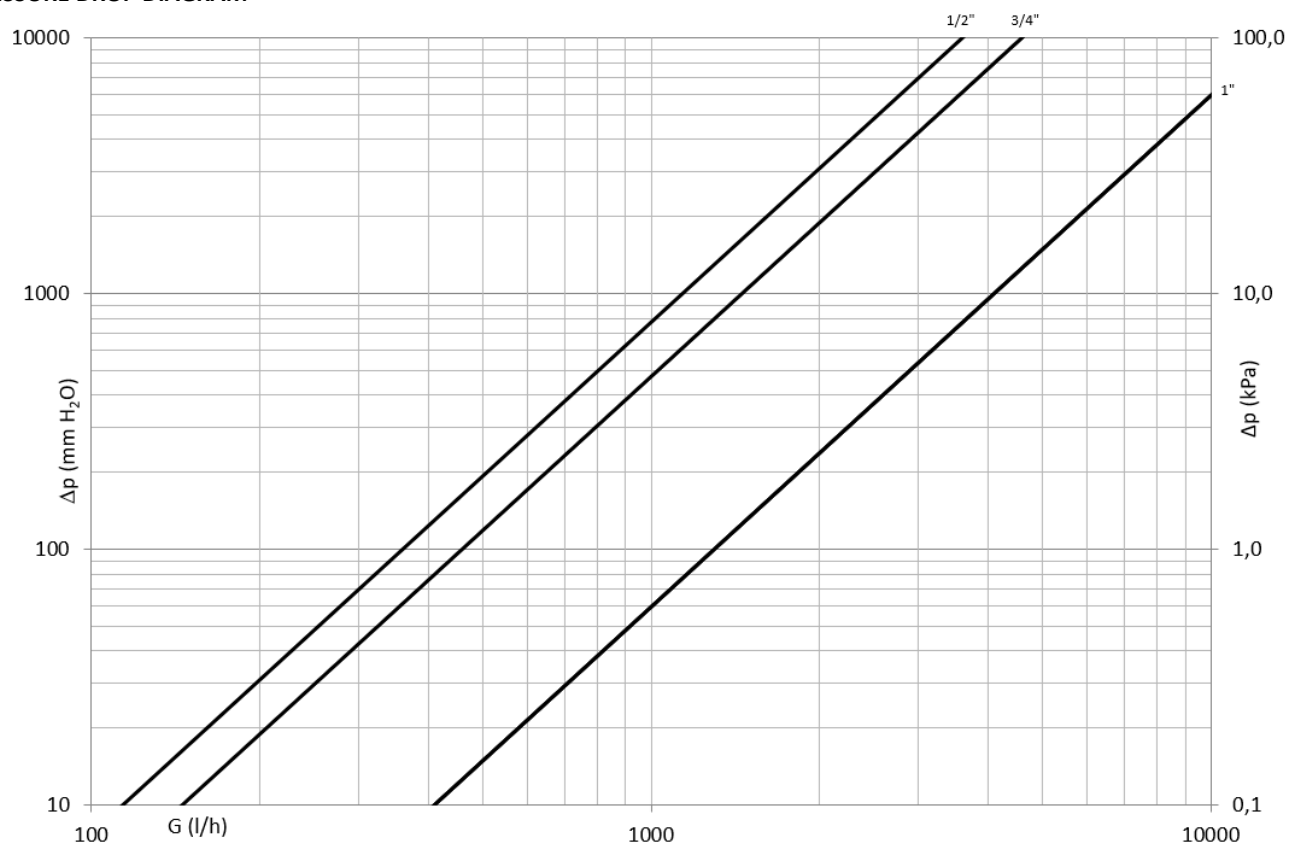

Dim.	1/2"	3/4"	1"
KV	3.6	4.6	13
PN	16	16	16