




DESCRIPTION

750R

Angle micrometric radiator lockshield valve, union tail with O-Ring included. Female thread. Nickel-plated.

DIMENSIONS

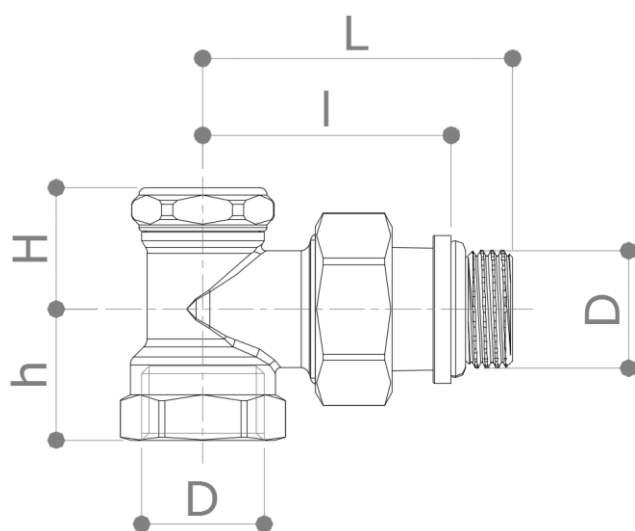

D	3/8"	1/2"
H	23	21.5
h	20	23
L	51	54
I	41	45
Weight [g]	190	230

Dimensions in mm

All threads are conform to ISO 7 or ISO 228 standards.

MATERIALS

Body	CW617N (EN 12165) CuZn40Pb2
Tail	CW617N (EN 12165) CuZn40Pb2
Nut	CW617N (EN 12165) CuZn40Pb2
O-ring	EPDM
Lock	CW614N (EN 12164) CuZn39Pb3
Cap	CW614N (EN 12164) CuZn39Pb3

RECCOMANDED PRESSURE / TEMPERATURE LIMITS


10 bar - 100°C - non shock

Nominal pressure: 10 bar

APPROVALS



PRESSURE DROP DIAGRAM

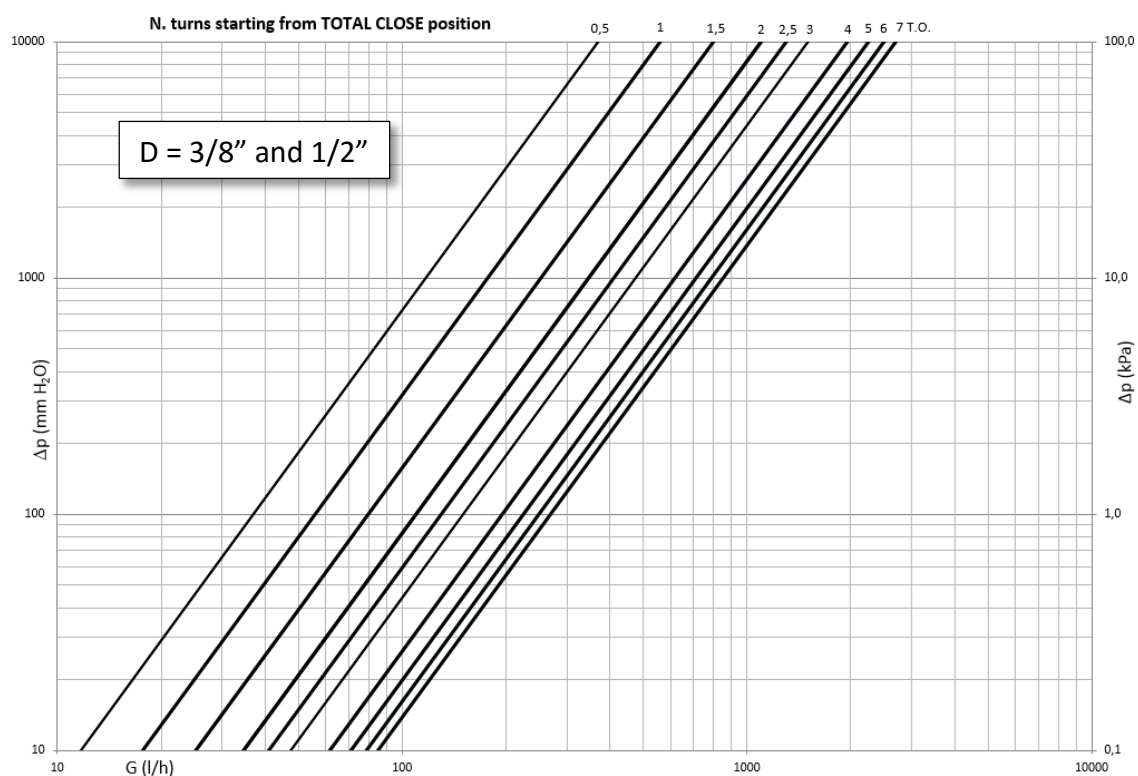

Turns	0.5	1	1.5	2	2.5	3	4	5	6	7 T.O.
Kv	0.37	0.56	0.80	1.1	1.3	1.5	1.95	2.25	2.5	2.7

T.O.: Total Open