




DESCRIPTION

755R

Angle micrometric radiator lockshield valve, union tail with O-Ring included. Compression end. Nickel-plated. Without fittings (Art. **3015 – 3015SCR – 3625 – 3525**)

DIMENSIONS

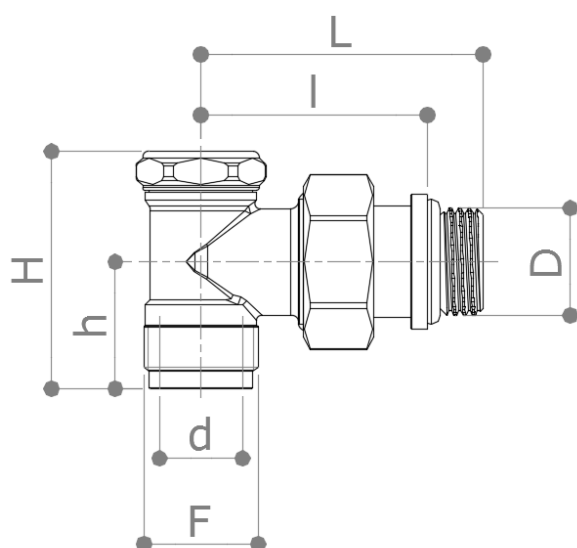

D x d	3/8" x 16	1/2" x 16	1/2" x 18
F	Ø 22-19 fil. x 1"	Ø 22-19 fil. x 1"	Ø 23-19 fil. x 1"
H	46.5	46	52
h	23.5	24.5	24.5
L	51	54	54
I	41	45	45
Peso [g]	140	170	160

Dimensions in mm

All threads are conform to ISO 7 or ISO 228 standards.

MATERIALS

Body	CW617N (EN 12165) CuZn40Pb2
Tail	CW617N (EN 12165) CuZn40Pb2
Nut	CW617N (EN 12165) CuZn40Pb2
O-ring	EPDM
Lock	CW614N (EN 12164) CuZn39Pb3
Cap	CW614N (EN 12164) CuZn39Pb3

RECCOMANDED PRESSURE / TEMPERATURE LIMITS


10 bar - 100°C - non shock

Nominal pressure: 10 bar

APPROVALS



PRESSURE DROP DIAGRAM

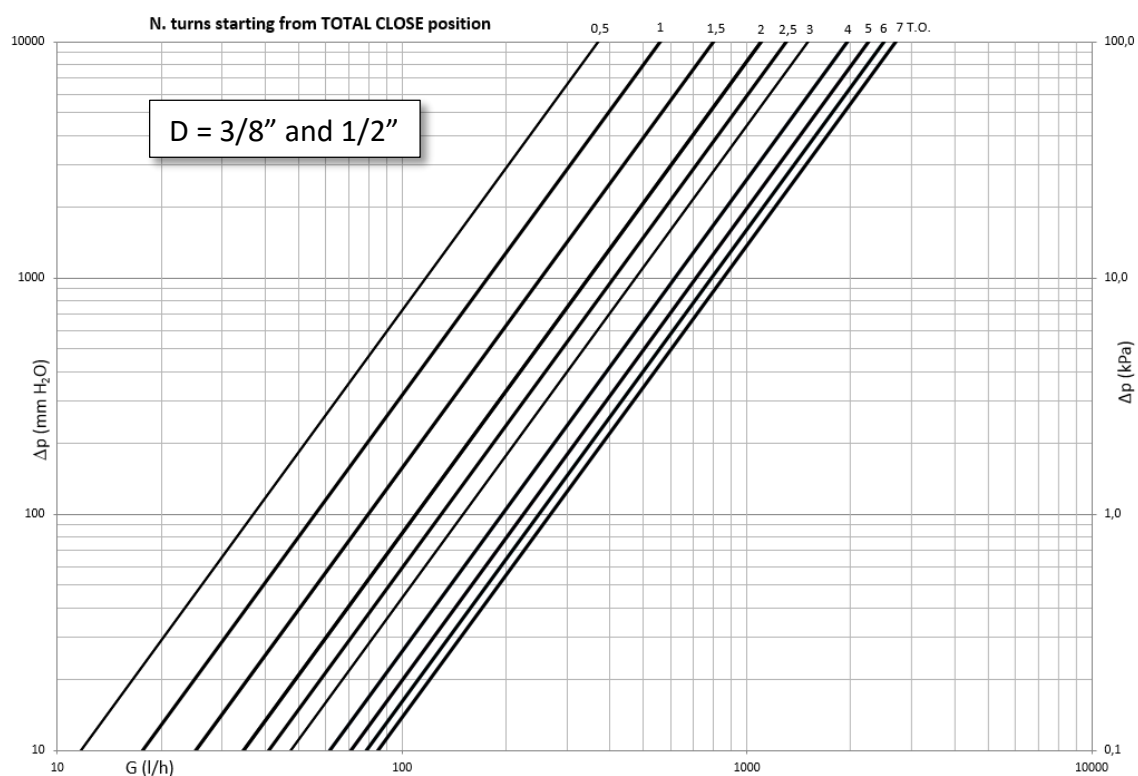

Turns	0.5	1	1.5	2	2.5	3	4	5	6	7 T.O.
Kv	0.37	0.56	0.80	1.1	1.3	1.5	1.95	2.25	2.5	2.7

T.O.: Total Open