




DESCRIPTION

376

F x F chrome plated mini ballvalve.
Black lever

Conform to **EN 13828**

DIMENSIONS

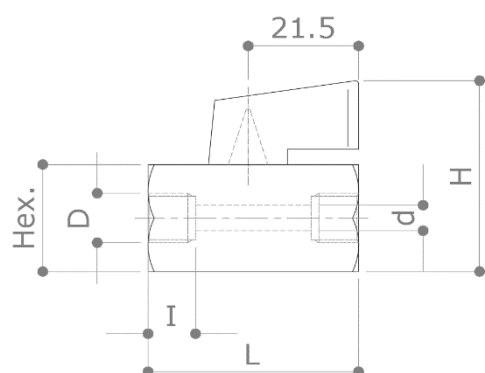

D	1/8"	1/4"	3/8"	1/2"	3/4"
Hex.	20	20	20	24	30
d	8	8	8	10	13,5
H	38	38	38	42	47
I	10	10	10	12	14
L	40	40	42	47	54
Weight [g]	80	80	80	120	120

Dimensions in **mm**

All threads are conform to ISO 7 or ISO 228 standards

MATERIALS


Body	CW617N (EN 12165) CuZn40Pb2
Ball	CW617N (EN 12165) CuZn40Pb2 Chrome plated
Stem	CW617N (EN 12165) CuZn40Pb2
Stuffing box	CW617N (EN 12165) CuZn40Pb2
Seat	1 x PTFE
O-Rings	NBR
Handle	ABS (steel for size 3/4")

RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS

10 bar

-10°C (no frost) - +70°C (+90°C peak)

PRESSURE DROP DIAGRAM

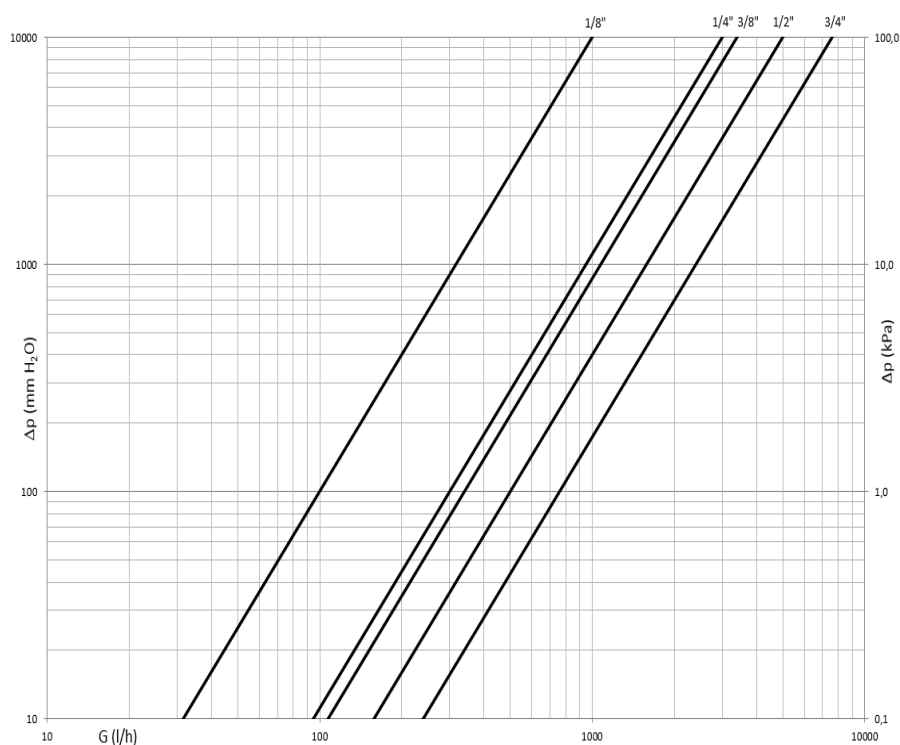

Dim.	1/8"	1/4"	3/8"	1/2"	3/4"
Kv	1	3	3.4	5	7.6
PN	10	10	10	10	10