




DESCRIPTION

376S

F x F chrome plated mini ball valve.
Screwdriver slot

Conform to **EN 13828**

DIMENSIONS

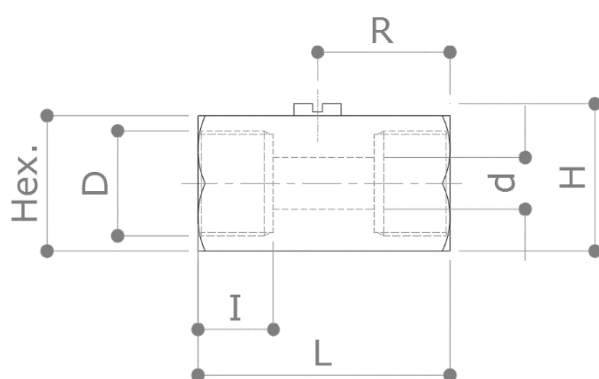

D	3/8"	1/2"
Hex.	20	24
d	8	10
R	21	24
H	24	28
I	10	12
L	40	47
Weight [g]	90	130

Dimensions in **mm**

All threads are conform to ISO 7 and ISO 228 standards


MATERIALS

Body	CW617N (EN 12165) CuZn40Pb2
Ball	CW617N (EN 12165) CuZn40Pb2 Chrome plated
Stem	CW617N (EN 12165) CuZn40Pb2
Stuffing box	CW617N (EN 12165) CuZn40Pb2
Seat	1 x PTFE
O-Rings	NBR
Handle	CW617N (EN 12165) CuZn40Pb2

RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS

10 bar
-10°C (no frost) - +70°C (+90°C peak)

PRESSURE DROP DIAGRAM

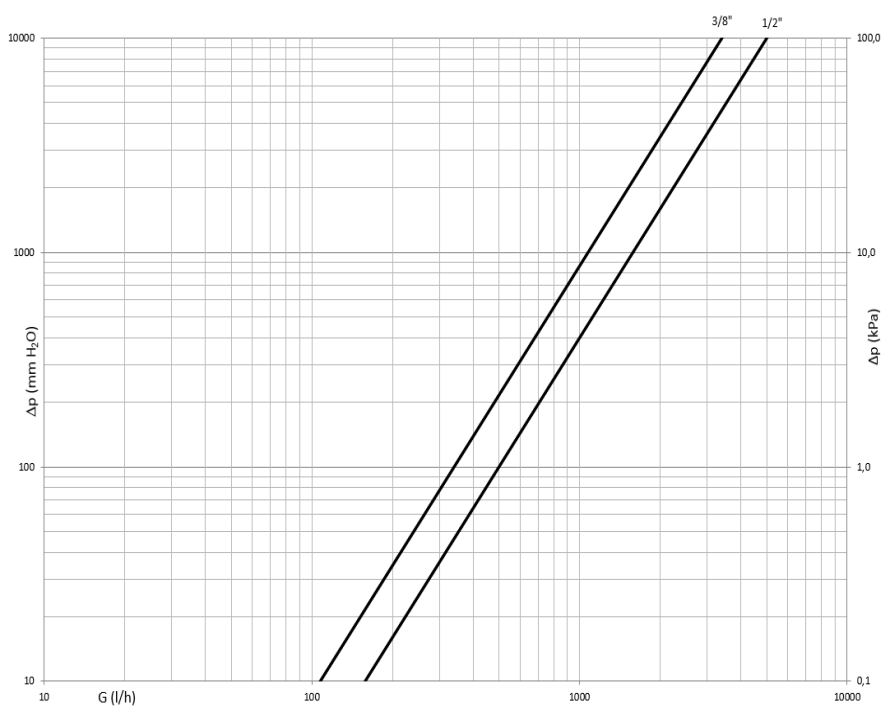

Dim.	3/8"	1/2"
Kv	3.4	5
PN	10	10