




DESCRIPTION

377S

F x M chrome plated mini ball valve.
Screwdriver slot

Conform to **EN 13828**

DIMENSIONS

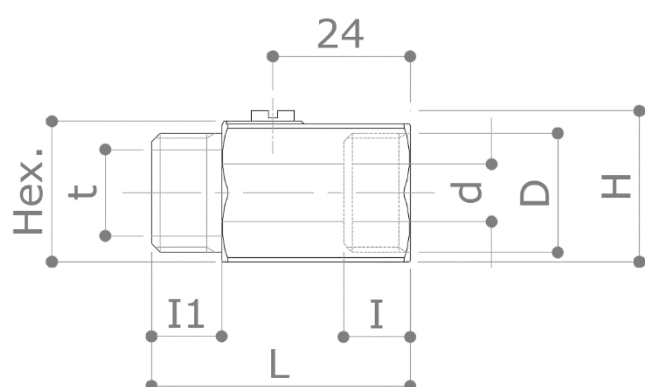

D	1/2"
Hex.	24
d	10
H	41
t	15
I	12
I1	12
L	45
Weight [g]	105

Dimensions in **mm**

All threads are conform to ISO 7 or ISO 228 standard

MATERIALS


Body	CW617N (EN 12165) CuZn40Pb2
Ball	CW617N (EN 12165) CuZn40Pb2 Chrome plated
Stem	CW617N (EN 12165) CuZn40Pb2
Stuffing box	CW617N (EN 12165) CuZn40Pb2
Seat	1 x PTFE
O-Rings	NBR
Handle	CW617N (EN 12165) CuZn40Pb2

RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS

10 bar

-10°C (no frost) - +70°C (+90°C peak)

PRESSURE DROP DIAGRAM

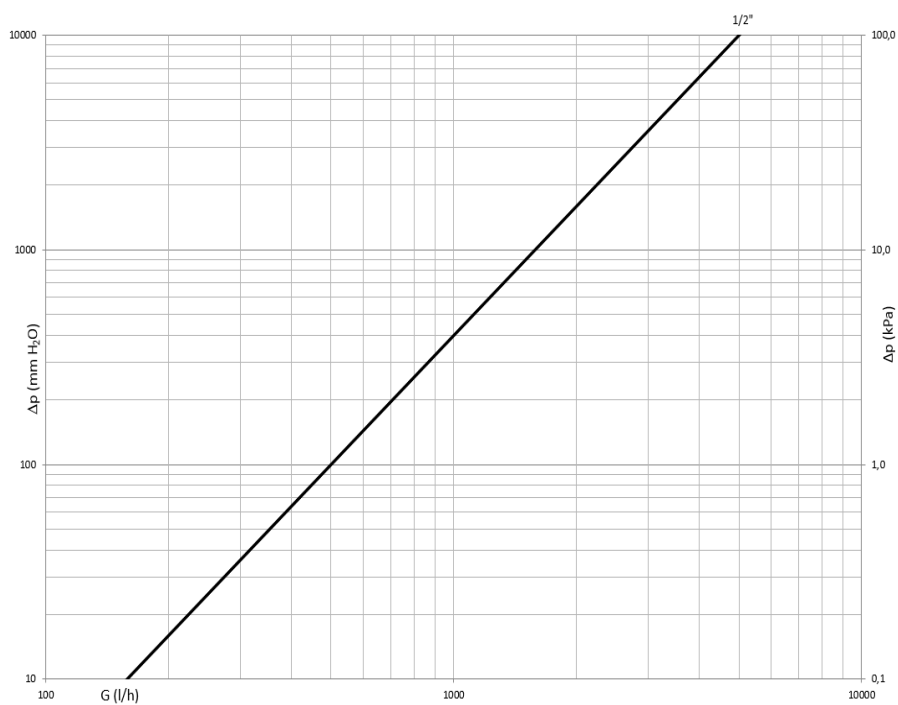

Dim.	1/2"
Kv	5
PN	10