




DESCRIPTION

175GLO

Brass gate valve F x F export type.

DIMENSIONS

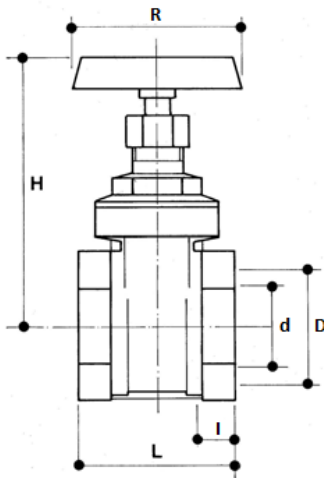

D	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	15	19	24	32	37	47
H	68	78	91	108	125	143
I	9	10	11	12	13	13
L	38	44	48	57	58	63
R	45	50	55	60	70	80
Weight [g]	175	250	370	540	680	1125

Dimensions in **mm**

All threads are conform to ISO 228 standard

MATERIALS

Body	CW617N (EN 12165) CuZn40Pb2
Disc	DELTA C (EN 1982 CB 754S)
Stem	CW614N (EN 12164) CuZn39Pb3
Stuffing box	CW614N (EN 12164) CuZn39Pb3
Stop-ring	CW614N (EN 12164) CuZn39Pb3
Bonnet	CW617N (EN 12165) CuZn40Pb2
Body seal	Fiber
O-Rings	EPDM
Handwheel	Steel with red epoxy resin coating


APPROVALS



RECOMMENDED WORKING PRESSURE / TEMPERATURE LIMITS

16 bar – 80°C – non shock

PRESSURE DROP DIAGRAM

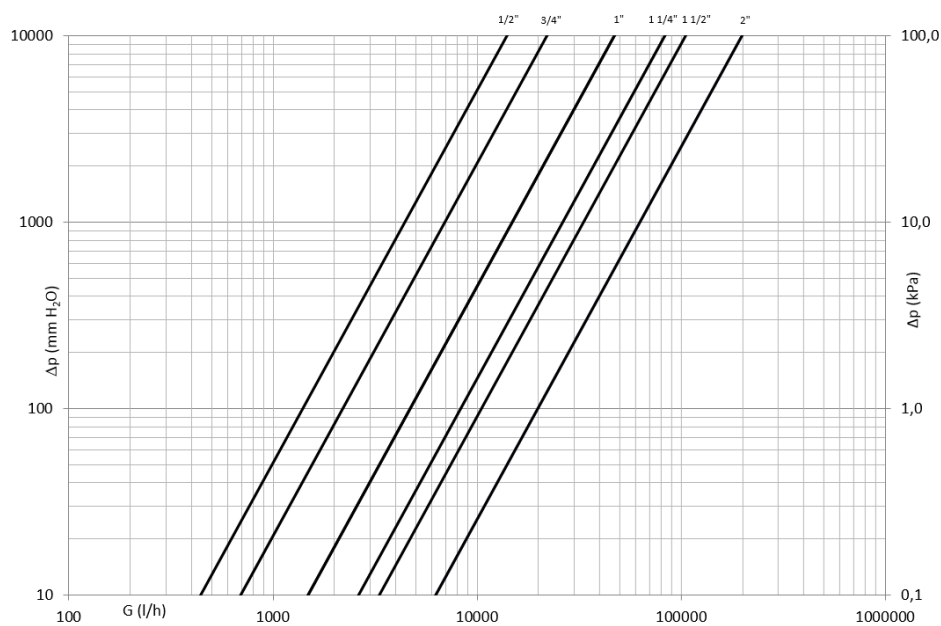

Dim.	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv	14	22	47	83	105	198
PN	16	16	16	16	16	16