




DESCRIPTION

175GLB

Bronze gate valve F x F export type.

DIMENSIONS

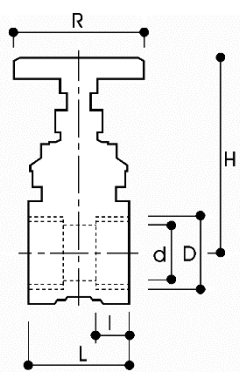

D	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	12	13	19	23	28	35	45
H	71	71	78	89	105	115	136
I	10	12	10	14	16	16	16
L	36	42	45	51	54	59	67
R	50	55	50	65	70	75	85
Weight [g]	175	205	290	405	585	780	1200

Dimensions in mm

All threads are conform to ISO 228 standard

MATERIALS

Body	CC491K EN 1982 (EN 12165) CuSn5Zn5Pb5
Disc	DELTA CS EN 1982 CB 7535
Stem	CW614N (EN 12164) CuZn39Pb3
Stuffing box	CW614N (EN 12164) CuZn39Pb3
Stop-ring	CW614N (EN 12164) CuZn39Pb3
Bonnet	CW617N (EN 12165) CuZn40Pb2
Stem seal	PTFE
Head Seal	Fiber
Handlewheel	Steel with red plastic coating

APPROVALS




RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS

16 bar – 80°C – non shock

6 bar – 95°C – non shock

PRESSURE DROP DIAGRAM

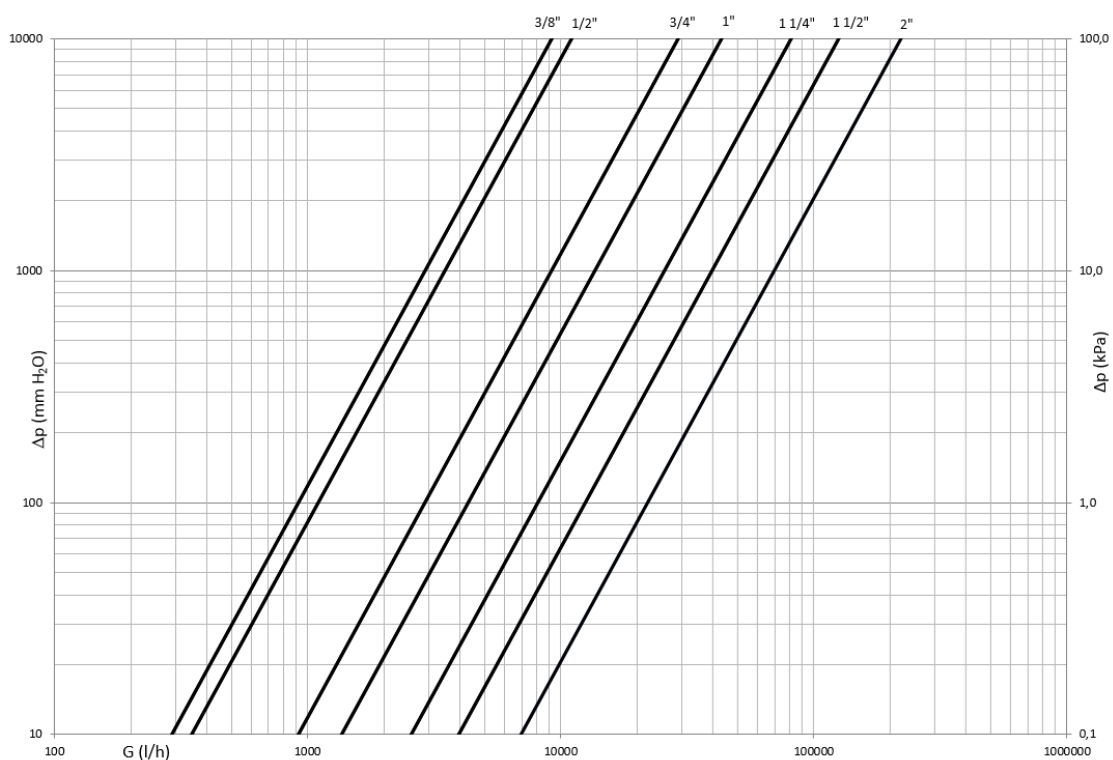

Dim.	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv	9.2	11	29	43	81	125	220
PN	16	16	16	16	16	16	16