




DESCRIPTION

51/3

F x Tail Piece heavy duty full-flow ball valve. Nickel plated. Reversible red steel handle.

Conform to **EN 13828**

DIMENSIONS

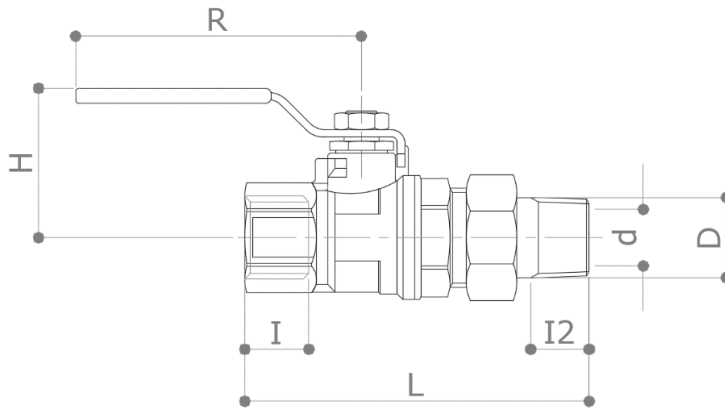

D	½" x ½"	¾" x ¾"	1" x 1"	1 ¼" x 1 ¼"
d	15	20	25	32
H	39	49	61	66
I	17	18	21.5	23.5
I2	13	14	16	18.5
L	93	105	119	135
R	75	95	120	120
Weight [g]	315	510	860	1305

Dimensions in mm

All threads are conform to ISO 7 or ISO 228 standards


MATERIALS

- Body** CW617N (EN 12165) CuZn40Pb2
- Ball** CW617N (EN 12165) CuZn40Pb2 Chrome plated
- Stem** CW614N (EN 12164) CuZn39Pb3
- Stuffing box** CW614N (EN 12164) CuZn39Pb3 Adjustable
- Nut** CW617N (EN 12165) CuZn40Pb2
- Tail** CW617N (EN 12165) CuZn40Pb2
- Seat** 2 x PTFE + 1 x PTFE seal on the stem
- O-Rings** 2 x FKM
- Handle** Delta Protect coated steel. PVC grip with "Pad printing"

APPROVALS




PRESSURE DROP DIAGRAM

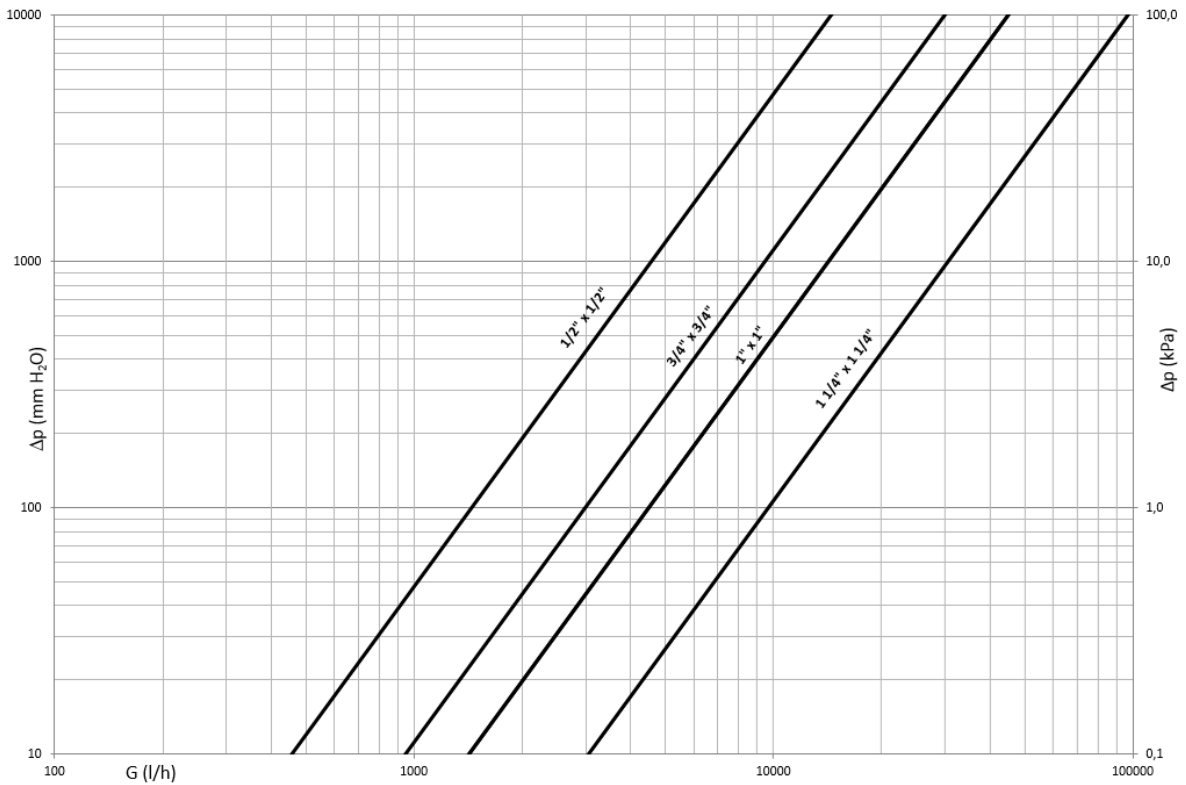

Dim.	1/2" x 1/2"	3/4" x 3/4"	1" x 1"	1 1/4" x 1 1/4"
Kv	14.5	30	45	97
PN	30	30	30	30

TEMPERATURE / PRESSURE DIAGRAM

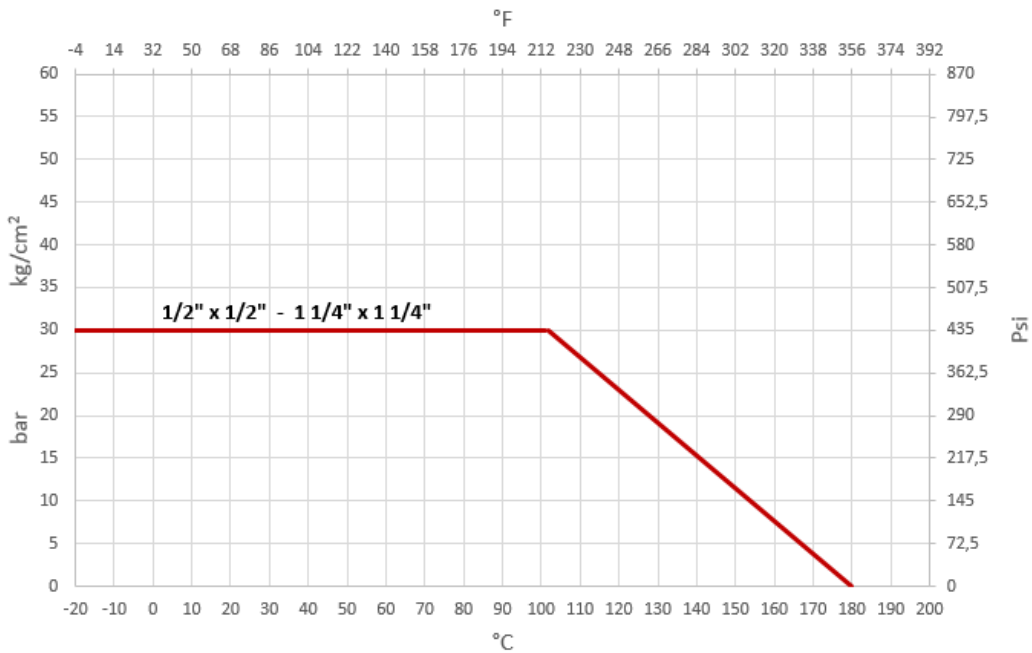

RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS

- 30 bar – 100°C – non shock
- 10 bar – 150°C – non shock