




DESCRIPTION

751N

Straight micrometric radiator lockshield valve, union tail with sealant film included. Female thread. Nickel-plated.

DIMENSIONS

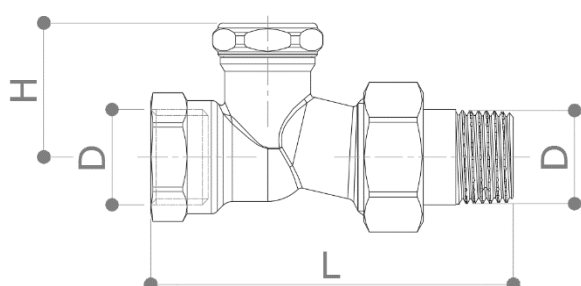

D	3/8"	1/2"	3/4"
H	30.5	30.5	34.5
L	73.5	83	83
Weight [g]	160	200	275

Dimensions in mm

All threads are conform to ISO 7 or ISO 228 standards.

MATERIALS

Body	CW617N (EN 12165) CuZn40Pb2
Tail	CW617N (EN 12165) CuZn40Pb2
Nut	CW617N (EN 12165) CuZn40Pb2
O-ring	EPDM
Lock	CW614N (EN 12164) CuZn39Pb3
Cap	CW614N (EN 12164) CuZn39Pb3

RECCOMANDED PRESSURE / TEMPERATURE LIMITS


10 bar - 100°C - non shock

Nominal pressure: 10 bar

APPROVALS




PRESSURE DROP DIAGRAM

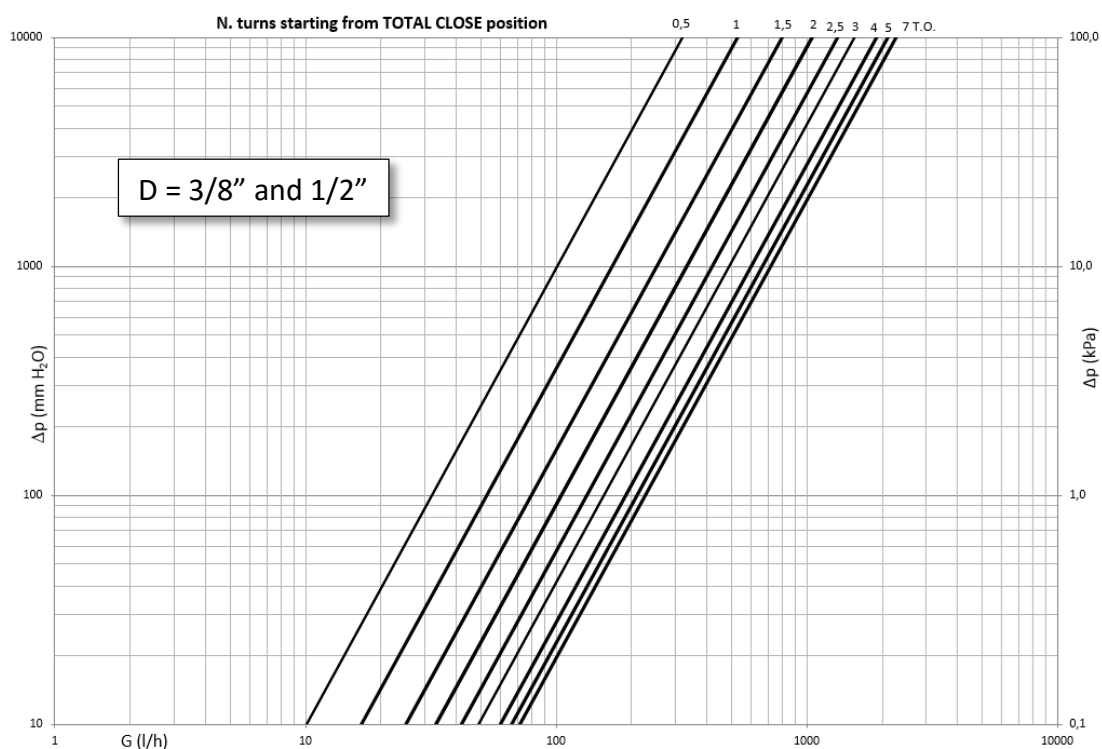

Turns	0.5	1	1.5	2	2.5	3	4	5	7 T.O.
Kv	0.32	0.53	0.80	1.05	1.33	1.55	1.9	2.11	2.27

T.O.: Total Open

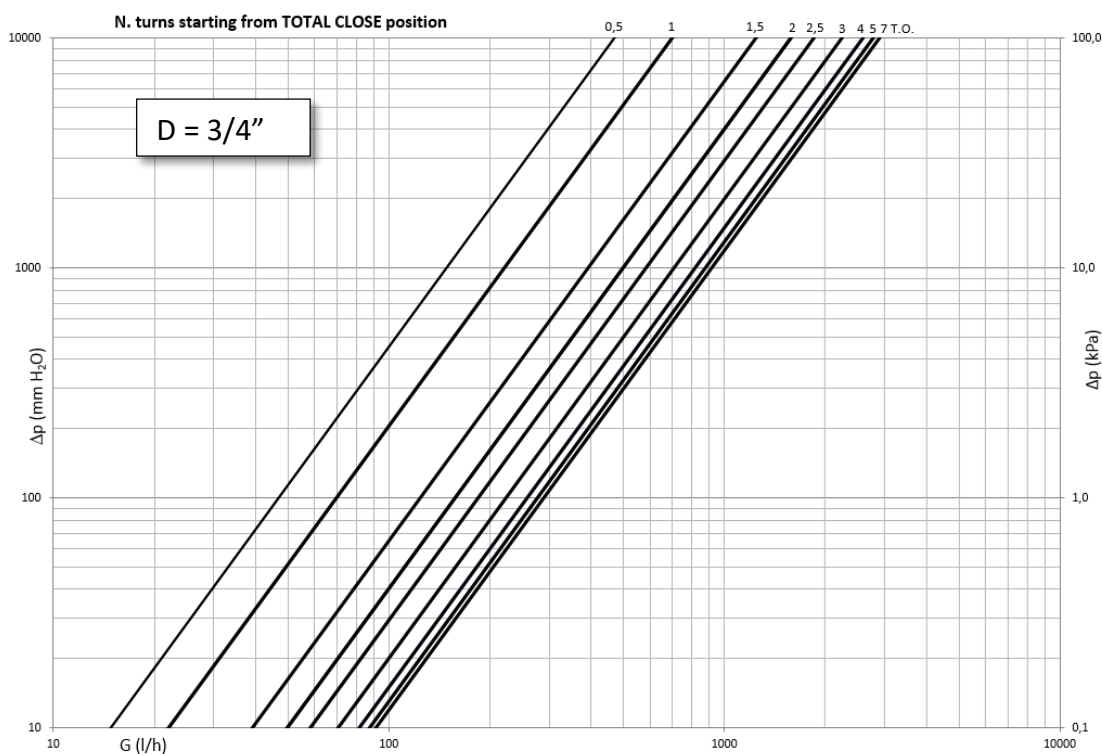

Turns	0.5	1	1.5	2	2.5	3	4	5	7 T.O.
Kv	0.47	0.7	1.24	1.58	1.85	2.24	2.58	2.77	2.9

T.O.: Total Open