




DESCRIPTION

276B

F x F heavy duty full-flow ball built-in valve chrome cap and lockshield.

Conform to **EN 13828**

DIMENSIONS

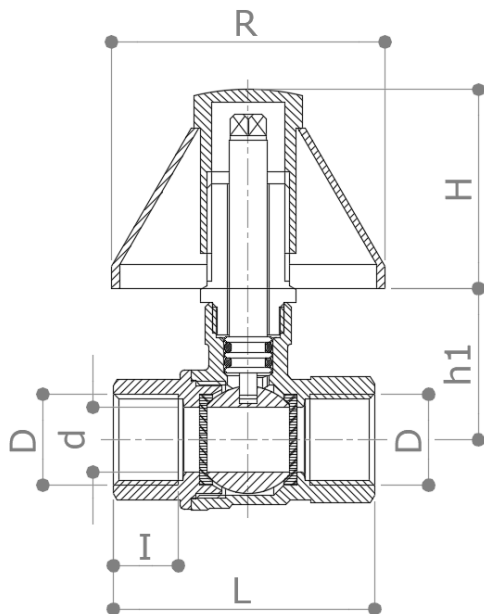

D	½"
d	15
H	42
h1 max	48
h1 min	33
I	15
L	60
R	62
Weight [g]	360


Dimensions in **mm**

All threads are conform to ISO EN 10226 (ISO 7/1) standard.

MATERIALS

Body	CW617N (EN 12165) CuZn40Pb2
Ball	CW614N (EN 12164) CuZn39Pb3 Nickel plated
Stem	CW614N (EN 12164) CuZn39Pb3
Gear	CW614N (EN 12164) CuZn39Pb3
Seat	2 x PTFE
O-Rings	2 x NBR
Cap	AISI 304 stainless steel
Lockshield	Zamak UNI 3717

PRESSURE DROP DIAGRAM

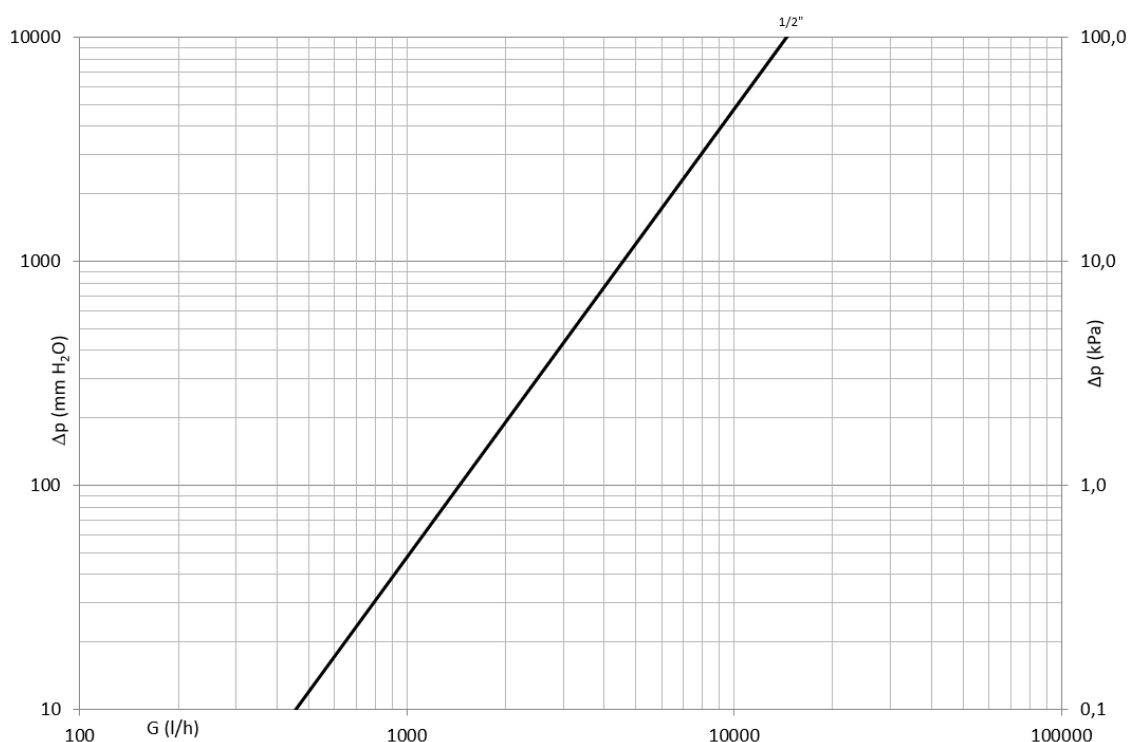

Dim.	1/2"
Kv	14.5
PN	40

OPERATING TEMPERATURE

0°C - +100°C – no frost

ACCESSORY – 0277B

Handle extension; to be fixed by the M4x38 screw included.

