



DESCRIPTION

184MO



Clapet en laiton F x F avec joint en laiton.

DIMENSIONS

D	½"	¾"	1"	1 ¼"	1 ½"	2"	2 ½"	3"	4"
d	15	20	25	30	35	47	55	70	90
H	50	63	69	82	92	94	107	130	159
I	10	10	12	12	12	11	16	16	20
L	48	58	70	81	88	97	118	135	164
Poids [g]	200	330	490	490	890	1000	1590	2440	3850

Dimensions en mm

Tous les filetages sont exécutés suivant les normes ISO 7 ou ISO 228

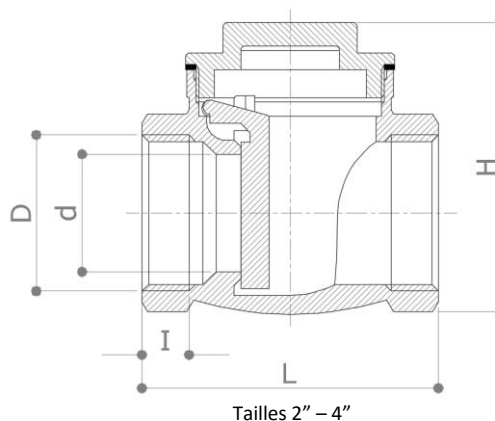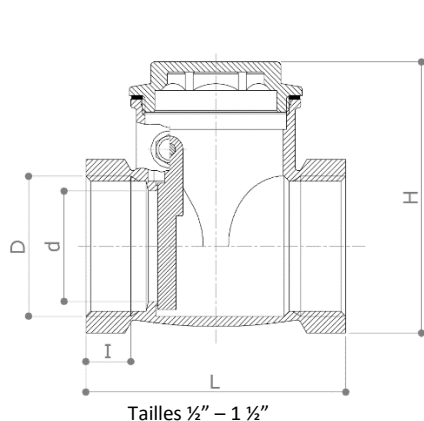

MATERIAUX

Corps CW617N (UNI EN 12165) CuZn40Pb2

Bouchon CW617N (UNI EN 12165) CuZn40Pb2

Clapet CW617N (UNI EN 12165) CuZn39Pb3

Joint bouchon Fibre

CERTIFICATION




LIMITES DE PRESSION / TEMPÉRATURA RECOMMANDÉES

10 bar – 100°C – non rupture (1/2" – 2")


6 bar – 100°C – non rupture (2 ½" – 4")

DIAGRAMME DES PERTES DE CHARGE

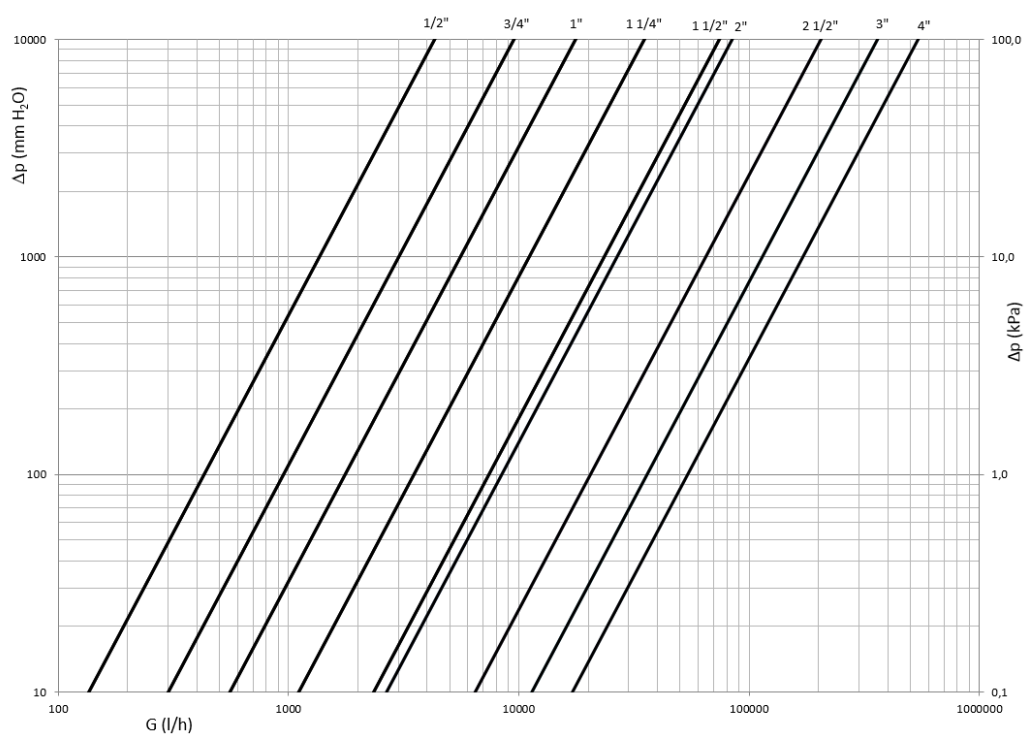

Dim.	½"	¾"	1"	1 ¼"	1 ½"	2"	2 ½"	3"	4"
Kv	4.3	9.5	17.6	35	74	83	204	360	540
PN	10	10	10	10	10	10	6	6	6

EXEMPLE D'INSTALLATION

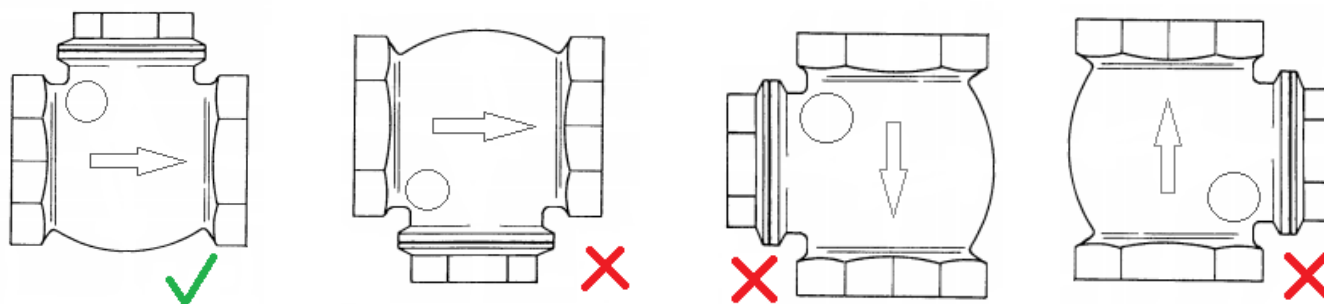

Installer le clapet sur tuyaux horizontaux et avec le bouchon tourné vers le haut.