




DESCRIZIONE

175GLO

Saracinesca F x F in ottone di tipo export.

DIMENSIONI

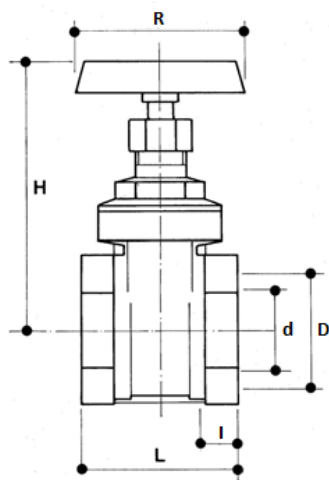

D	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	15	19	24	32	37	47
H	68	78	91	108	125	143
I	9	10	11	12	13	13
L	38	44	48	57	58	63
R	45	50	55	60	70	80
Peso [g]	175	250	370	540	680	1125

Dimensioni in mm

Tutte le filettature sono eseguite secondo la norma ISO 228

MATERIALI

Corpo	CW617N (UNI EN 12165) CuZn40Pb2
Disco	DELTA C (EN 1982 CB 754S)
Asta	CW614N (UNI EN 12164) CuZn39Pb3
Premistoppa	CW614N (UNI EN 12164) CuZn39Pb3
Ferma-asta	CW614N (UNI EN 12164) CuZn39Pb3
Coperchio	CW617N (UNI EN 12165) CuZn40Pb2
Guarnizione corpo	Fibra
O-Rings	EPDM
Volantino	Lamiera di acciaio con rivestimento in resina epossidica rossa


CERTIFICAZIONI



LIMITI DI PRESSIONE / TEMPERATURA RACCOMANDATI

16 bar – 80°C – non rottura

DIAGRAMMA DELLE PERDITE DI CARICO

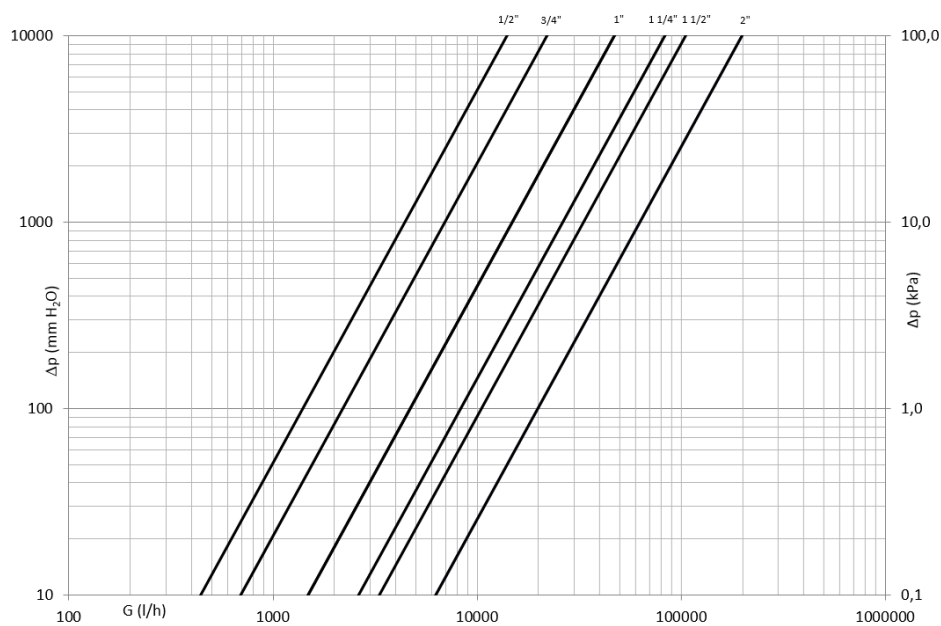

Dim.	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv	14	22	47	83	105	198
PN	16	16	16	16	16	16