




DESCRIZIONE

175GLB

Saracinesca F x F in bronzo di tipo export.

DIMENSIONI

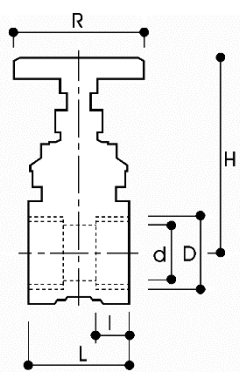

D	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	12	13	19	23	28	35	45
H	71	71	78	89	105	115	136
I	10	12	10	14	16	16	16
L	36	42	45	51	54	59	67
R	50	55	50	65	70	75	85
Peso [g]	175	205	290	405	585	780	1200

Dimensioni in mm

Tutte le filettature sono eseguite secondo la norma ISO 228

MATERIALI

Corpo	CC491K EN 1982 (EN 12165) CuSn5Zn5Pb5
Disco	DELTA CS EN 1982 CB 7535
Asta	CW614N (UNI EN 12164) CuZn39Pb3
Premistoppa	CW614N (UNI EN 12164) CuZn39Pb3
Ferma-asta	CW614N (UNI EN 12164) CuZn39Pb3
Coperchio	CW617N (UNI EN 12165) CuZn40Pb2
Guarnizione corpo	Fibra
Guarnizione asta	PTFE
Volantino	Lamiera di acciaio con rivestimento in plastica

CERTIFICAZIONI




LIMITI DI PRESSIONE / TEMPERATURA RACCOMANDATI

16 bar – 80°C – non rottura

6 bar – 95°C – non rottura

DIAGRAMMA DELLE PERDITE DI CARICO

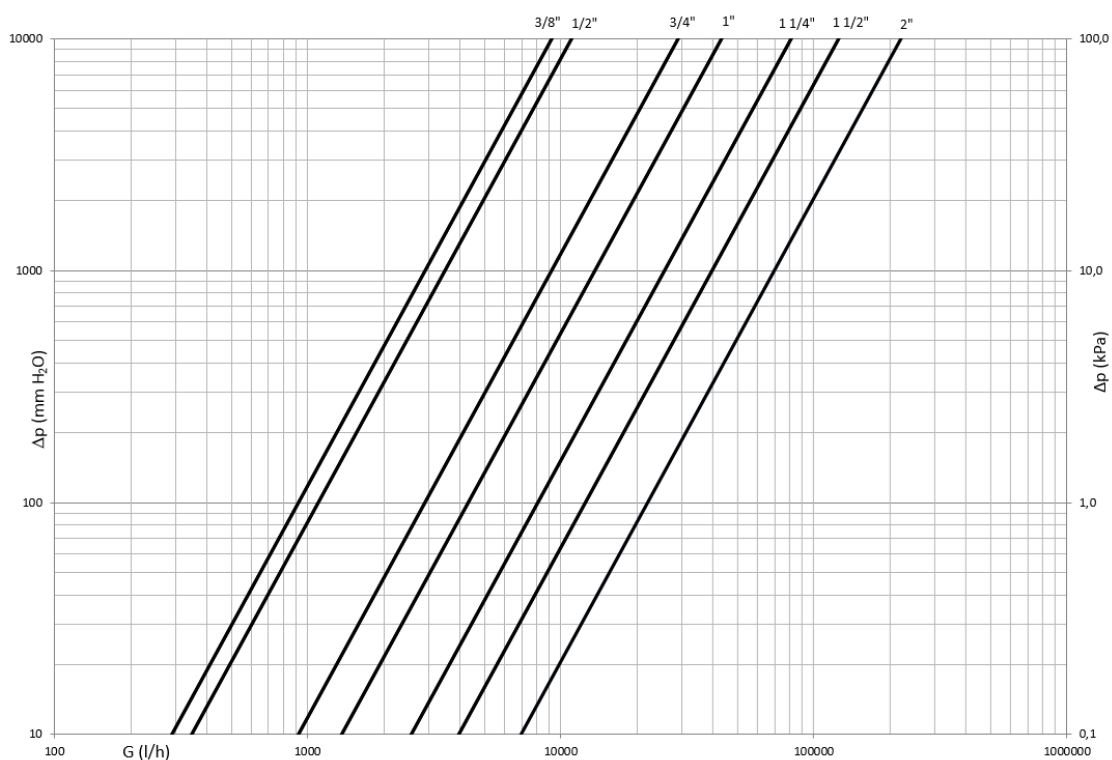

Dim.	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Kv	9.2	11	29	43	81	125	220
PN	16	16	16	16	16	16	16