



DESCRIZIONE


52/1

Valvola a sfera a passaggio totale F x M con maniglia a farfalla. Nichelata.

Maniglia a farfalla rossa (52/1) e maniglia a farfalla blu (52/1B).

Conforme alla norma **EN 13828**

DIMENSIONI

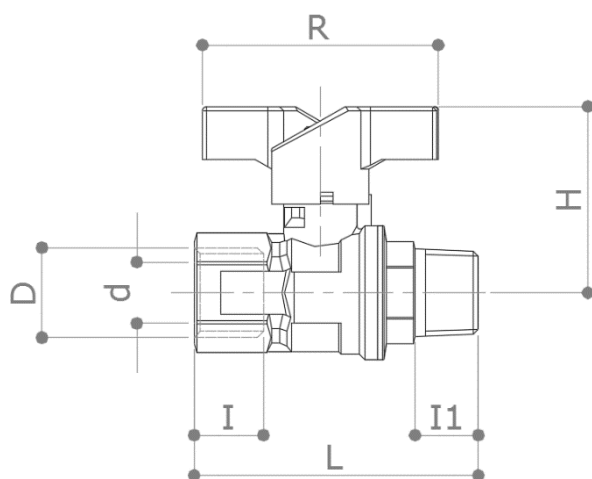

D	¼"	3/8"	½"	¾"	1"	1 ¼"
d	10	10	15	20	25	32
H	43	43	46	56	65	71
I	11.5	12	17	18	21.5	23.5
I1	10	11	15	16	20	21
L	57	58	70	79	94	106
R	58	58	58	65	75	75
Peso [g]	150	150	230	360	630	950

Dimensioni in mm

Tutte le filettature sono eseguite secondo le norme ISO 7 o ISO 228


MATERIALI

Corpo	CW617N (EN 12165) CuZn40Pb2
Sfera	CW617N (EN 12165) CuZn40Pb2 Cromata
Asta	CW614N (EN 12164) CuZn39Pb3
Premistoppa	CW614N (EN 12164) CuZn39Pb3 Regolabile
Sedi	2 x PTFE + 1 x PTFE sull'asta
O-Rings	2 x FKM
Leva	Alluminio verniciato

CERTIFICAZIONI




DIAGRAMMA DELLE PERDITE DI CARICO

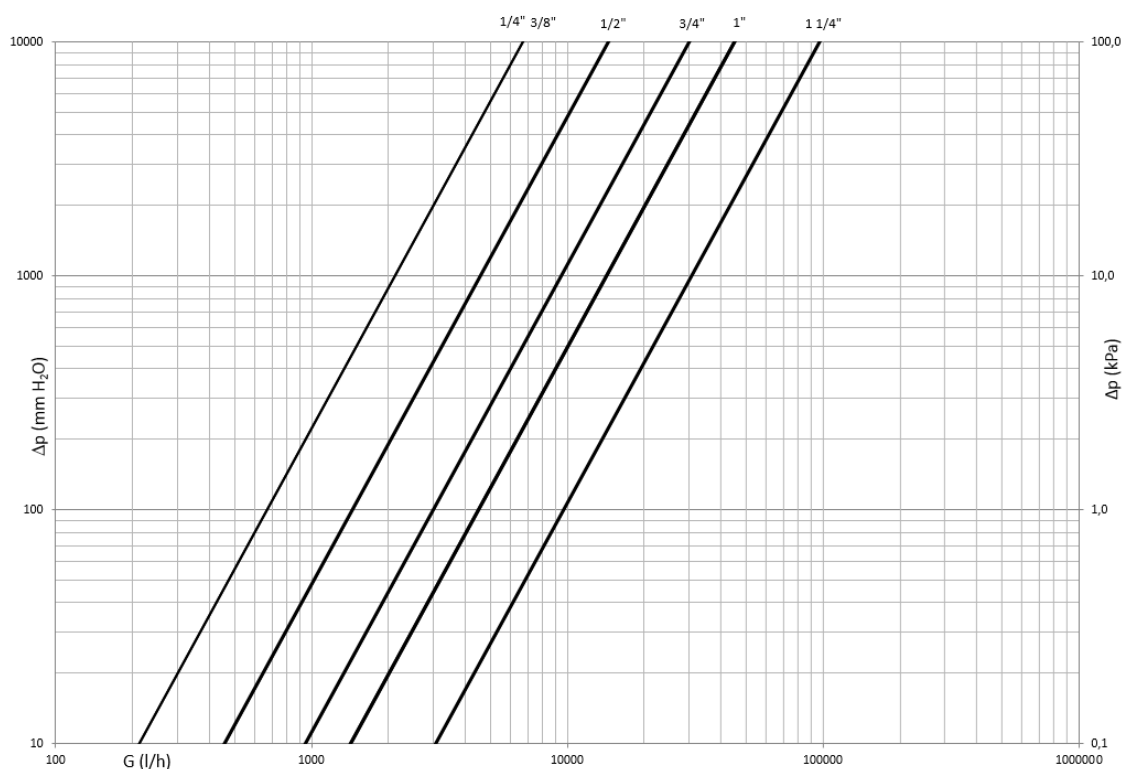

Dim.	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"
Kv	6.6	6.7	14.5	30	45	97
PN	42	42	42	42	35	35

DIAGRAMMA PRESSIONE / TEMPERATURA

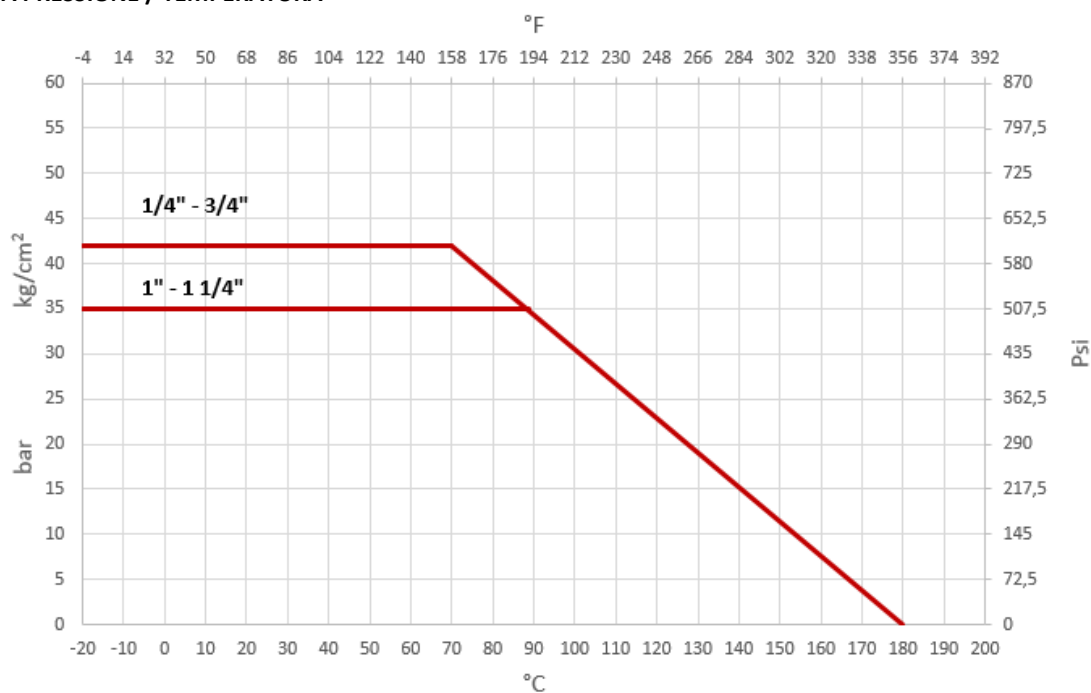

LIMITI DI PRESSIONE / TEMPERATURA RECCOMANDATI

30 bar – 100°C – non rottura

10 bar – 150°C – non rottura