




# DESCRIZIONE

## 277B

Valvola a sfera a passaggio totale F x F ad incasso con rosone e deviatore cromati. Nichelata.

Conforme alla norma **EN 13828**

# DIMENSIONI

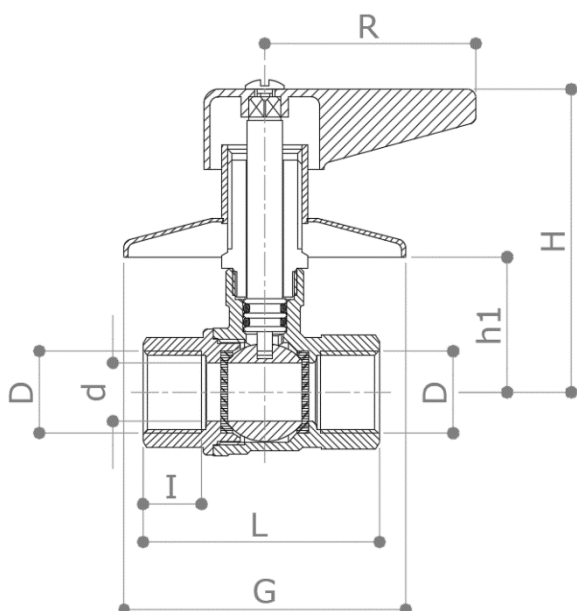

|                 |     |
|-----------------|-----|
| <b>D</b>        | ½"  |
| <b>d</b>        | 15  |
| <b>H</b>        | 79  |
| <b>h1 max</b>   | 41  |
| <b>h1 min</b>   | 25  |
| <b>I</b>        | 15  |
| <b>L</b>        | 59  |
| <b>R</b>        | 54  |
| <b>G</b>        | 68  |
| <b>Peso [g]</b> | 400 |

Dimensioni in **mm**

Tutte le filettature sono eseguite secondo le norme ISO EN 10226 (ISO 7/1)

# MATERIALI

|                        |                                       |
|------------------------|---------------------------------------|
| <b>Corpo</b>           | CW617N (EN 12165) CuZn40Pb2           |
| <b>Sfera</b>           | CW614N (EN 12164) CuZn39Pb3 Nichelata |
| <b>Asta</b>            | CW614N (EN 12164) CuZn39Pb3           |
| <b>Ghiera-vitone</b>   | CW614N (EN 12164) CuZn39Pb3           |
| <b>Sedi</b>            | 2 x PTFE                              |
| <b>O-Rings</b>         | 2 x NBR                               |
| <b>Copri-ghiera</b>    | Alluminio                             |
| <b>Rosone</b>          | Acciaio AISI 304                      |
| <b>Maniglia e vite</b> | CW614N (EN 12164) CuZn39Pb3 Cromata   |

# DIAGRAMMA DELLE PERDITE DI CARICO



|      |      |
|------|------|
| Dim. | 1/2" |
| Kv   | 14.5 |
| PN   | 40   |

## TEMPERATURA DI ESERCIZIO

0°C – +100°C – no congelamento

## ACCESSORIO – 0277B

Estensione leva; da fissare con la vite M4x38 inclusa.

