



DESCRIPTION

P200 – P200XT – P200TEA

Brass manifold for sanitary water systems with 2, 3 or 4 ways.


Connections ½" X 15 mm.

P200: yellow finishing manifold

P200TEA: TEA finishing manifold

P200XT: TEA finishing manifold with P220 adapter included (PEX 15 mm x 2.5 mm)

DIMENSIONS

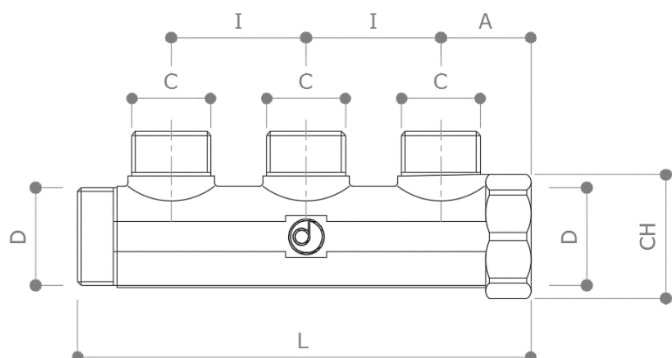

	P202 P202XT P202TEA	P203 P203XT P203TEA	P204 P204XT P204TEA
D	¾"	¾"	¾"
I	36	36	36
A	24	24	24
L	85	121	157
C	½" x 15	½" x 15	½" x 15
CH	32	32	32
Ways	2	3	4
Weight (g)	340	470	650

All threads are conform to ISO 228 standard.

Dimensions in mm

MATERIALS


Body CW617N (EN 12165) CuZn40Pb2

TECHNICAL SPECIFICATION

Max water temperature 100°C
Max pressure 10 bars

PRESSURE DROP DIAGRAM

	Kv
Manifold P200	5.5
P200 + P219 (or P220)	3.25

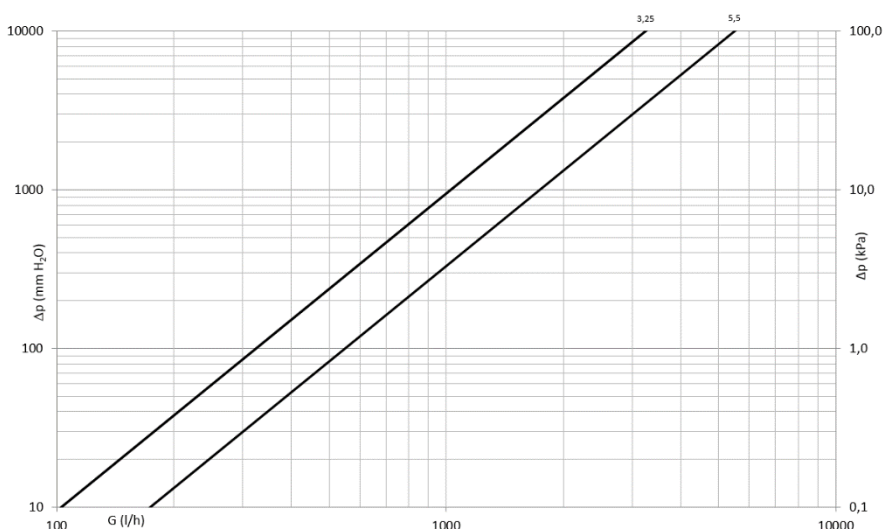

RECOMMENDED WORKING TEMPERATURE/PRESSURE LIMITS

10 bar – 100°C

APPROVALS



Certification n. P200: 03/00158
Certification n. P200XT: 03/00159
Certification n. P200TEA: 03/00160

ADDITIONAL COMPONENTS

Several accessories are available for pipe connection and installation:

P219 / P219TEA: adapting set for multilayer pipe.
Dimension: 15 x (16 x 2)



P231 / P231TEA: 3/4" M brass cap with O-ring for **P200, P200XT, P200TEA** manifolds



P220 / P220TEA: adapting set for PEX pipe
Dimension: 15 x (15 x 2.5)



P227 / P227TEA: 1/2" and 3/4" F brass cap with seat for **P210** manifolds

