




DESCRIZIONE

175C

Saracinesca F x F in ottone di tipo export.

DIMENSIONI

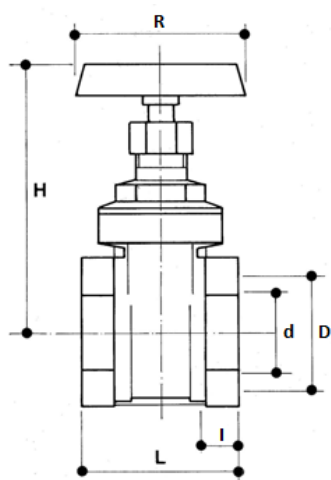

D	2 1/2"	3"	4"
d	60	72	93
H	175	200	235
I	13	14	16
L	64	74	84
R	100	100	120
Peso [g]	1670	2280	4135

Dimensioni in mm

Tutte le filettature sono eseguite secondo la norma ISO 228

MATERIALI

Corpo	DELTA C (EN 1982 CB 754S)
Disco	DELTA C (EN 1982 CB 754S)
Asta	CW614N (UNI EN 12164) CuZn39Pb3
Premistoppa	CW614N (UNI EN 12164) CuZn39Pb3
Ferma-asta	CW614N (UNI EN 12164) CuZn39Pb3
Coperchio	CW617N (UNI EN 12165) CuZn40Pb2
Guarnizione corpo	Fibra
O-Rings	EPDM
Volantino	Lamiera di acciaio con rivestimento in resina epossidica rossa


CERTIFICAZIONI



LIMITI DI PRESSIONE / TEMPERATURA RACCOMANDATI

16 bar – 80°C – non rottura

DIAGRAMMA DELLE PERDITE DI CARICO

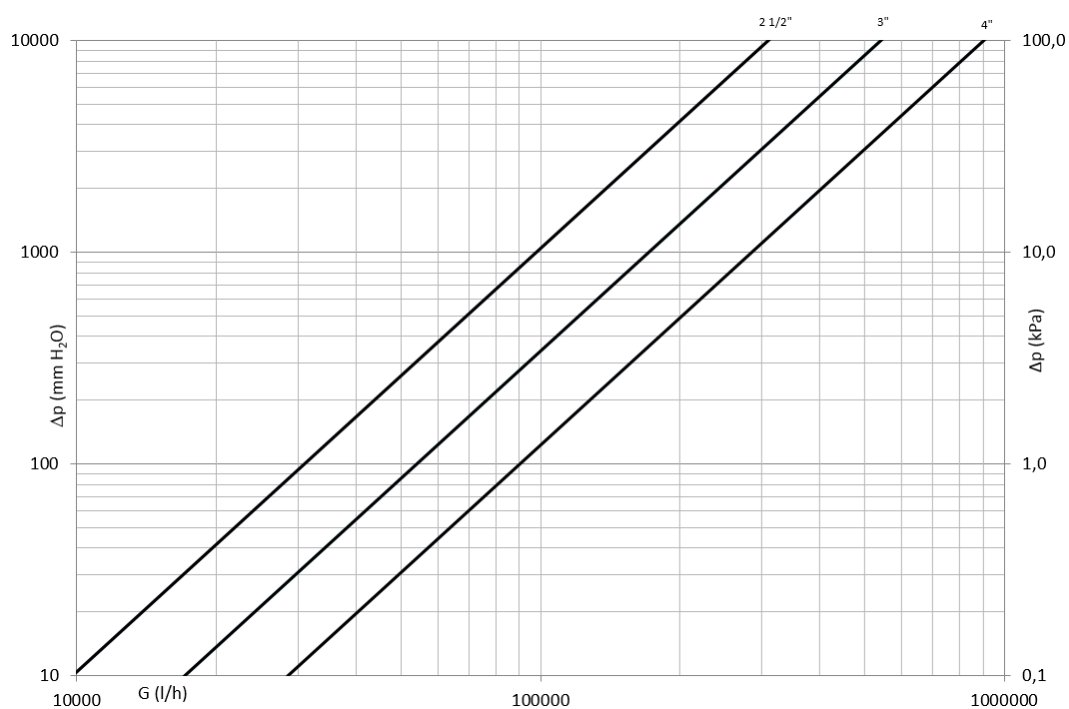

Dim.	2 1/2"	3"	4"
Kv	310	540	900
PN	16	16	16